

# Energy Minimization for the Half-Duplex Relay Channel with Decode-Forward Relaying

Fanny Parzysz, Mai Vu, François Gagnon

## Abstract

We analyze coding for energy efficiency in relay channels for a fixed source rate. We propose a comprehensive half-duplex decode-forward scheme and three optimal sets of power allocation, which respectively minimize the network, the relay and the source energy consumption. Analysis shows that minimizing the network energy consumption at a given rate is not equivalent to maximizing the rate given energy, since it only covers a part of all rates achievable with partial decode-forward. We therefore combine the proposed schemes for minimizing network and relay energy consumptions into a generalized one, which then covers all achievable rates. This generalized scheme is not only energy-optimal but also rate-optimal for the consumed energy. Furthermore, we derive the optimal power allocation in closed-form, which has so far remained only implicit with maximum-rate schemes. Performance simulation shows that proposed schemes save significant energy compared to both direct and two-hop transmissions commonly used in cellular networks. Up to 2.2dB of energy gain and 37.5% of outage reduction are reached at cell-edge. The results also give a detailed understanding of power consumption regimes and allow a comprehensive and practical description of the optimal message coding and resource allocation for each desired source rate and channel realization.

## I. INTRODUCTION

As a key feature of future wireless systems, relaying has attracted a lot of attention in recent years. Upper and lower bounds on the relay channel capacity are first established in [1], derived for AWGN relay channels with frequency division in [2] and extended to multiple relays in [3]. Power allocation maximizing the source rate at a given power is analyzed in [4]. However, user applications are mainly associated with a fixed minimum rate, defined as a Quality-of-Service feature [5], and run on power-limited devices. This limitation has spurred energy-efficient designs. Practical on-demand cooperation techniques, such as incremental redundancy [6], can increase the overall network performance. In this case, the relay consumes resource and energy only when responding to requests from a destination.

A part of this paper has been presented at IEEE ITW2011 - Paraty, Brasil. This work has been supported in part by Ultra Electronics TCS and the Natural Science and Engineering Council of Canada as part of the High Performance Emergency and Tactical Wireless Communication Chair at cole de Technologie Suprieure

Fanny Parzysz and François Gagnon are with École de Technologie Supérieure, Montreal, Canada

Mai Vu is with McGill University, Montreal, Canada

Nevertheless, such strategies are used when few or no channel state information is available at the transmitter. Assuming channel information at transmitters, bounds on the minimum energy-per-bit are established in [2] and power allocations for relay channels are derived in [7, 8].

However, energy efficiency analysis is mostly based on power allocations optimized for rate as in [8]. Coding and optimization directly for energy remain scarce. One reason is that the two problems of maximizing rate at a given network power and minimizing network power at a given rate are generally considered equivalent [4, 8]. Nevertheless, neither optimization problem is fully characterized. Power allocations optimized for rate remain implicit without closed-form solutions, while power allocations for energy are mainly based on suboptimal coding schemes, with unrealistic constraints, such as full-duplex transmissions [7] or no individual power constraints [7, 8].

In this paper, we explore energy optimization for the relay channel. We first propose a comprehensive half-duplex coding scheme based on time division for the Gaussian relay channel. Then, we explicitly optimize its resource allocation for energy efficiency at a desired source rate and individual node power constraints. We consider three objectives: the network, the relay and the source energy consumption. Specifically, we show that maximizing rate and minimizing network energy consumption are not equivalent as often believed. We next combine the proposed schemes into a generalized one that maximizes the energy-efficiency of the Gaussian relay channel and simulate its performance in real environment as a function of both the source rate and the mobile user position.

The paper is organized as follows. The new coding scheme is analyzed for Gaussian channels in Section II. We optimize the resource allocation for network, relay and source energy efficiency in Section III and build the generalized scheme in Section IV. Section V presents the performance analysis and Section VI concludes this paper.

## II. A COMPREHENSIVE HALF-DUPLEX DECODE-FORWARD SCHEME FOR GAUSSIAN CHANNELS

### A. Channel model

We consider a half-duplex channel with time division, such that the transmission is carried out in two phases within each code block of normalized length. During the first phase, of duration  $\theta \in [0, 1/2]$ , the source transmits while the relay listens. During the second phase, of duration  $\bar{\theta} = (1 - \theta)$ , both the source and the relay transmit. We consider complex Gaussian channels, where  $h_d$ ,  $h_s$  and  $h_r$  respectively stand for the gain of the direct link, the source-to-relay link and the relay-to-destination link, as depicted in Figure 1. We assume gain channel information is known globally at all nodes. Consider independent AWGN  $Z_1$ ,  $Z_2$  and  $Z_r$  with variance  $N$ . The half-duplex Gaussian relay channel is written as follows.

$$Y_r = h_s X_1 + Z_r \quad ; \quad Y_1 = h_d X_1 + Z_1 \quad ; \quad Y_2 = h_d X_2 + h_r X_r + Z_2$$

### B. Coding scheme for the Gaussian relay channel

Considering cooperative transmission, superposition modulation is considered for implementation of relaying in future telecommunication standards. As shown in [9], this strategy outperforms other tech-

niques, such as bit-interleaved coded modulation, at even lower receiver complexity. We therefore consider superposition coding and the half-duplex partial decode-forward scheme presented in previous work [10] for the discrete memoryless and the Gaussian channel. This coding scheme is re-stated below for the benefit of the reader.

To send a message  $m$  of rate  $R$  to the destination, the source performs message splitting. It divides the initial message into two parts  $(m_d, m_r)$ , with rates  $R_d$  and  $R_r$  respectively, where  $R_d + R_r = R$ . The message  $m_d$  is directly decoded by the destination at the end of the second phase, whereas  $m_r$  is intended to be relayed. The coding scheme is depicted in Figure 1.

The source and the relay have individual power constraints  $P_s$  and  $P_r$  within the same bandwidth. At each phase, each node allocates to each message a portion of its available transmit power. Denote  $\eta_1$  and  $\eta_2$  as the portion of source power  $P_s$  allocated to  $m_d$  in the first and second phase respectively, similarly,  $\rho_1$  and  $\rho_2$  as the portion for  $m_r$ . Denote  $\rho_r$  as the portion of the relay power  $P_r$  used to forward  $\tilde{m}_r$  to the destination. We consider transmit power constraint at each node such that

$$P_s^{(c)} = \theta (\eta_1 + \rho_1) P_s + \bar{\theta} (\eta_2 + \rho_2) P_s \leq P_s \quad \text{and} \quad P_r^{(c)} = \bar{\theta} \rho_r P_r \leq P_r. \quad (1)$$

Applying the proposed scheme the Gaussian relay channel and denoting codewords of length  $n$  as  $X^n = [X_1^{\theta n} X_2^{\bar{\theta} n}]$ , the transmit signal in the two phases can be written as

$$X_r = \sqrt{\rho_r P_r} U \quad ; \quad X_1 = \sqrt{\rho_1 P_s} U + \sqrt{\eta_1 P_s} V \quad ; \quad X_2 = \sqrt{\rho_2 P_s} U + \sqrt{\eta_2 P_s} V \quad (2)$$

where  $U^n(m_r) \sim \mathcal{N}(0, 1)$  and  $V^n(m_d) \sim \mathcal{N}(0, 1)$  are independent. Here, the optimal  $U$  and  $X_r$  are fully correlated to allow a beamforming gain at the destination.

This comprehensive coding scheme covers direct and two-hops relaying as special cases, as well as the maximum-rate scheme proposed in [4].

**Proposition 1.** *For Gaussian relay channels, all rates satisfying the following constraints are achievable:*

$$\begin{aligned} R &\leq \theta \log_2 \left( 1 + \frac{(\eta_1 + \rho_1) P_s |h_d|^2}{N} \right) + \bar{\theta} \log_2 \left( 1 + \frac{(\eta_2 + \rho_2) P_s |h_d|^2 + \rho_r P_r |h_r|^2 + 2\sqrt{P_s |h_d|^2 P_r |h_r|^2 \rho_2 \rho_r}}{N} \right) = I_1 \\ R &\leq \theta \log_2 \left( 1 + \frac{\rho_1 P_s |h_s|^2}{N + \eta_1 P_s |h_s|^2} \right) + \theta \log_2 \left( 1 + \frac{\eta_1 P_s |h_d|^2}{N} \right) + \bar{\theta} \log_2 \left( 1 + \frac{\eta_2 P_s |h_d|^2}{N} \right) = I_2 \end{aligned} \quad (3)$$

where  $\theta \in [0, 1]$ , and power allocation set  $(\eta_1, \rho_1, \eta_2, \rho_2, \rho_r)$  is non-negative and satisfies constraint (1).

### C. Energy-optimization problem

We propose to optimize the above coding scheme for energy efficiency in the Gaussian relay channel at a given source rate. We consider three cases: the network, the relay and the source power consumptions.

Specifically, we look for the optimal set  $(\rho_1, \eta_1, \rho_2, \eta_2, \rho_r)$  solving the following general problem:

$$\begin{aligned} \min \quad & \omega_s [\theta (\eta_1 + \rho_1) P_s + \bar{\theta} (\eta_2 + \rho_2) P_s] + \omega_r \bar{\theta} \rho_r P_r \\ \text{s.t.} \quad & I_1 \geq R \quad ; \quad I_2 \geq R \\ & P_s^{(c)} \leq P_s \quad ; \quad P_r^{(c)} \leq P_r \end{aligned} \quad (4)$$

where  $\omega_s$  and  $\omega_r$  are either 0 or 1, depending on the targeted optimization. The two rate constraints ensure achievability of the source rate, given two individual power constraints. Since the scheme is based on decode-forward, we only need to consider the case  $|h_d|^2 \leq |h_s|^2$ , for which using a relay is helpful. Otherwise, direct transmission is used.

### III. THREE ENERGY EFFICIENT SCHEMES FOR THE RELAY CHANNEL

In this section, we explore the energy optimization for the relay channel considering three objectives: the network, the relay and the source energy consumption. Then, we compare the maximum achievable rate of each proposed scheme.

#### A. Network energy optimal set of power allocation (N-EE)

In this optimization, we consider the total source and relay power consumption during both transmission phases. To minimize the total consumption while maintaining a desired source rate, we analyze the following optimization ( $\omega_s = 1, \omega_r = 1$ ):

$$\begin{aligned} \min \quad & [\theta (\eta_1 + \rho_1) P_s + \bar{\theta} (\eta_2 + \rho_2) P_s] + \bar{\theta} \rho_r P_r \\ \text{s.t.} \quad & I_1 \geq R \quad ; \quad I_2 \geq R \\ & P_s^{(c)} \leq P_s \quad ; \quad P_r^{(c)} \leq P_r \end{aligned} \quad (5)$$

The optimal scheme for network energy efficiency N-EE is given by Algorithm I. It is composed of the union of partial decode-forward (sub-scheme  $A^{(n)}$ ) and decode-forward (sub-scheme  $B^{(n)}$ ). Both are special cases of the coding scheme proposed in Section II.

The optimal power allocations of sub-schemes  $A^{(n)}$  and  $B^{(n)}$  are such that the power consumption of N-EE is a continuous function of the source rate. Allocations are respectively given by Propositions 2 and 3 following. The proof of optimal algorithm and power allocations can be found in Appendix A.

**Proposition 2.** *For a given  $\theta$ , sub-scheme  $A^{(n)}$  is such that*

- *In Phase 1, the source sends  $m_r$  with power  $\rho_1^* P_s$*
- *In Phase 2, the relay sends  $\tilde{m}_r$  with power  $\rho_r^* P_r$  and the source sends  $(m_r, m_d)$  with power  $(\rho_2^* P_s, \eta_2^* P_s)$ .*

*The optimal power allocation set for  $A^{(n)}$  is such that  $\rho_1^*$  is first found numerically by solving  $g_1(\rho_1^*) = 0$*

**if**  $|h_s|^2 \geq |h_d|^2$  **then**  
 Find  $\rho_1^* \in [0, 1/\theta]$  satisfying  $g_1(\rho_1^*) = 0$  where

$$g_1(s) = \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{sP_s|h_d|^2}{N}\right)^{1/\bar{\theta}}} - 1 + \frac{|h_r|^2}{|h_d|^2} \left( \frac{|h_s|^2}{|h_d|^2} \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{sP_s|h_s|^2}{N}\right)^{1/\bar{\theta}}} - 1 \right) \quad (6)$$

**if**  $\rho_1^*$  exists **then**  
 $R^{(n)} \leftarrow \theta \log_2 \left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)$   
**else**  
 $R^{(n)} \leftarrow \infty$   
**end if**  
**if**  $R \geq R^{(n)}$  **then**  
 Use sub-scheme  $A^{(n)}$  given in Proposition 2;  
**else**  
 Use sub-scheme  $B^{(n)}$  given in Proposition 3;  
**end if**  
**else**  
 Use direct transmission or declare outage if not feasible  
**end if**

ALGORITHM I: Optimal scheme for network energy efficiency, N-EE, solving (5)

as defined by Eq. (6) of Algorithm I. Next,  $(\rho_r^*, \rho_2^*, \eta_1^*, \eta_2^*)$  are deduced from  $\rho_1^*$  as follows:

$$\rho_r^* = \frac{N|h_r|^2}{P_r(|h_r|^2 + |h_d|^2)^2} \left( \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1^* P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1^* P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} \right)$$

$$\eta_1^* = 0 ; \eta_2^* = \left( \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1^* P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} - 1 \right) \frac{N}{P_s |h_d|^2} ; \rho_2^* = \frac{P_r |h_d|^2}{P_s |h_r|^2} \rho_r^*$$

If  $\eta_i^*$  and  $\rho_i^*$  do not satisfy the power constraints (1), the desired source rate cannot be achieved. In  $A^{(n)}$ ,  $\eta_2^*$  is positive if  $R \geq R^{(n)}$ , where  $R^{(n)}$  is defined in Algorithm I. If  $R \leq R^{(n)}$ , we apply  $B^{(n)}$  as discussed next. Note that, when the direct link is close to 0, the maximum feasible rate for  $m_d$  goes to zero. Due to power constraints, outage can occur at some rate  $R \leq R^{(n)}$ , such that sub-scheme  $A^{(n)}$  may not exist.

**Proposition 3.** For a given  $\theta$ , sub-scheme  $B^{(n)}$  is such that

- In Phase 1, the source sends  $m$  with power  $\rho_1^\dagger P_s$
- In Phase 2, the relay sends  $\tilde{m}$  with power  $\rho_r^\dagger P_r$  and the source sends  $m$  with power  $\rho_2^\dagger P_s$ .

The optimal power allocation for sub-scheme  $B^{(n)}$  is  $\eta_1^\dagger = \eta_2^\dagger = 0$  and

$$\rho_1^\dagger = \left(2^{R/\theta} - 1\right) \frac{N}{P_s|h_s|^2} ; \quad \rho_r^\dagger = \frac{N|h_r|^2}{P_r(|h_r|^2 + |h_d|^2)^2} \left( \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1^\dagger P_s|h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - 1 \right) ; \quad \rho_2^\dagger = \frac{P_r|h_d|^2}{P_s|h_r|^2} \rho_r^\dagger$$

$B^{(n)}$  is applied when the source rate is low. In this case, full decode-forward is energy-efficient and the whole source message benefits from the beamforming gain between the source and relay.

As an example, Figure 2 illustrates the power consumption of the above two sub-schemes, which differs mainly in the second phase. Thus, the figure plots the set of optimal power allocation and the total energy consumed by the source and the relay during this phase, as a function of the source rate. When the source rate is not achievable given power constraints, an outage occurs, which is depicted by a cut-off in the curve.

### B. Relay energy optimal set of power allocation (R-EE)

Next, we minimize only the relay power consumption and allow the source to consume up to  $P_s$  during both phases of the transmission. This scheme is of particular interest in networks where the relay is shared and has to serve many users, or where the relay has its own data to send. Thus, we analyze the following optimization problem:

$$\begin{aligned} \min \quad & \bar{\theta} \rho_r P_r \\ \text{s.t.} \quad & I_1 \geq R \quad ; \quad I_2 \geq R \\ & P_s^{(c)} \leq P_s \quad ; \quad P_r^{(c)} \leq P_r \end{aligned} \tag{7}$$

The optimal scheme for relay energy efficiency R-EE is given by Algorithm II and combines direct transmissions (sub-scheme  $C^{(r)}$ ), decode-forward (sub-scheme  $B^{(r)}$ ) and partial decode-forward (sub-scheme  $A^{(r)}$ ). Each is a special case of the coding scheme proposed in Section II. Note that direct transmissions can be optimal for relay energy but not for the source or the network energy.

The optimal power allocations of sub-schemes  $C^{(r)}$ ,  $B^{(r)}$  and  $A^{(r)}$  are such that the power consumption of R-EE is a continuous function of the source rate. Allocations are respectively given by Propositions 4, 5 and 6 following. The proof of optimal algorithm and power allocations can be found in Appendix B. In the following, we present each sub-scheme and associated power allocation going from low rates to high rates.

First, a scheme which aims at minimizing the relay energy consumption should always give priority to direct transmissions, such that, if possible, the relay is not used at all. Thus, as long as the direct link is strong enough to support the source rate, R-EE uses sub-scheme  $C^{(r)}$ .

**Proposition 4.** *For a given  $\theta$ , sub-scheme  $C^{(r)}$  refers to direct transmission. The optimal power allocation is as follows.*

$$\eta_1^\dagger = \eta_2^\dagger = (2^R - 1) \frac{N}{P_s|h_d|^2} ; \quad \rho_1^\dagger = \rho_2^\dagger = \rho_r^\dagger = 0$$

$R_1^{(r)} \leftarrow \log_2 \left( 1 + \frac{P_s |h_d|^2}{N} \right)$   
**if**  $R \leq R_1^{(r)}$  **then**  
     Use direct transmission, called sub-scheme  $C^{(r)}$ , as given in Proposition 4;  
**else if**  $|h_s|^2 \geq |h_d|^2$  **then**  
     Find  $\rho_1^* \in [0, 1/\theta]$  satisfying  $g_2(\rho_1^*) = 0$  where

$$g_2(s) = \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_d|^2}{N}\right)^{1/\bar{\theta}}} - 1 + g_3(s) \left( \frac{|h_s|^2}{|h_d|^2} \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_s|^2}{N}\right)^{1/\bar{\theta}}} - 1 \right) \quad (8)$$

and

$$g_3(s) = \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} \quad (9)$$

**if**  $\rho_1^*$  exists **then**  
      $R_2^{(r)} \leftarrow \theta \log_2 \left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)$   
**else**  
      $R_2^{(r)} \leftarrow \infty$   
**end if**  
**if**  $R \geq R_2^{(r)}$  **then**  
     Use sub-scheme  $A^{(r)}$  given in Proposition 6;  
**else**  
     Use sub-scheme  $B^{(r)}$  given in Proposition 5;  
**end if**  
**else**  
     Declare outage.  
**end if**

ALGORITHM II: Optimal scheme for relay energy efficiency, R-EE, solving (7)

If the source rate increases above  $R_1^{(r)}$  as defined in Algorithm II, direct transmission is not feasible any more due to the source power constraint. In this case, relaying is required and either sub-scheme  $A^{(r)}$  or  $B^{(r)}$  is applied, as discussed next. These sub-schemes are similar to  $A^{(n)}$  and  $B^{(n)}$  respectively, but with different power allocation. In the case of R-EE, the source consumes all its available power. If  $R \leq R_2^{(r)}$ , we apply sub-scheme  $B^{(r)}$ .

**Proposition 5.** For a given  $\theta$ , sub-scheme  $B^{(r)}$  is such that

- In Phase 1, the source sends  $m$  with power  $\rho_1^\dagger P_s$
- In Phase 2, the relay sends  $\tilde{m}$  with power  $\rho_r^\dagger P_r$  and the source sends  $m$  again, with power  $\rho_2^\dagger P_s$ .

The optimal power allocation for sub-scheme  $B^{(r)}$  is  $\eta_1^\dagger = \eta_2^\dagger = 0$  and

$$\rho_1^\dagger = \left( 2^{R/\theta} - 1 \right) \frac{N}{P_s |h_s|^2}; \quad \rho_2^\dagger = \frac{1 - \rho_1^\dagger \theta}{\theta}; \quad \rho_r^\dagger = \frac{N}{P_r |h_r|^2} \left( \sqrt{g_3(\rho_1^\dagger)} - \sqrt{\frac{P_s |h_d|^2 \rho_2^\dagger}{N}} \right)^2$$

Note that  $B^{(r)}$  only exists if the channel gains are such that  $R_1^{(r)} < R_2^{(r)}$ . This condition essentially

depends on the quality of the direct link. If the source rate increases again, message splitting is required and sub-scheme  $A^{(r)}$  is applied.

**Proposition 6.** *For a given  $\theta$ , sub-scheme  $A^{(r)}$  is such that*

- *In Phase 1, the source sends  $m_r$  with power  $\rho_1^* P_s$*
- *In Phase 2, the relay sends  $\tilde{m}_r$  with power  $\rho_r^* P_r$  and the source sends  $(m_r, m_d)$  with power  $(\rho_2^* P_s, \eta_2^* P_s)$ .*

*The optimal power allocation set for sub-scheme  $A^{(r)}$  is such that  $\rho_1^*$  is first found numerically by solving  $g_2(\rho_1^*) = 0$  as defined by Eq. (8) of Algorithm II. Next,  $g_3(\rho_1^*)$  is computed using (9) and  $(\rho_r^*, \rho_2^*, \eta_1^*, \eta_2^*)$  are deduced from  $\rho_1^*$  and  $g_3(\rho_1^*)$  as follows:*

$$\eta_1^* = 0 ; \quad \eta_2^* = \left( \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1^* P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} - 1 \right) \frac{N}{P_s |h_d|^2} ; \quad \rho_2^* = \frac{(1 - \rho_1^* \theta)}{\bar{\theta}} - \eta_2^*$$

$$\rho_r^* = \frac{N}{P_r |h_r|^2} \left( \sqrt{g_3(\rho_1^*)} - \sqrt{\frac{P_s |h_d|^2 \rho_2^*}{N}} \right)^2$$

If  $\eta_i^*$  and  $\rho_i^*$  do not satisfy the power constraints in (1), the desired source rate cannot be achieved. Similarly to  $A^{(n)}$ , when the direct link is very weak, sub-scheme  $A^{(r)}$  may not exist.

Figure 3 illustrates the above sub-schemes and plots the total energy consumption during the second phase as a function of the source rate. Somewhat unexpectedly, the energy consumed during the second phase is decreasing in  $R$  when applying sub-scheme  $B^{(r)}$ . Since the destination decodes the message using the received signals during both phases, the optimization shows that it is relay energy-optimal for the source to allocate more energy during the first phase. Nevertheless, the total energy consumed during both phases is strictly increasing with rate, as expected.

### C. Source energy optimal set of power allocation (S-EE)

As the last problem, we minimize the source power consumption alone, which benefits networks in which the relay is not power critical. We thus allow the relay to consume up to  $\frac{P_r}{\bar{\theta}}$  during the second transmission phase of length  $\bar{\theta}$  (the relay power constraint  $P_r$  is considered over the two phases of the transmission). We analyze the following optimization problem:

$$\begin{aligned} \min \quad & \theta (\eta_1 + \rho_1) P_s + \bar{\theta} (\eta_2 + \rho_2) P_s \\ \text{s.t.} \quad & I_1 \geq R \quad ; \quad I_2 \geq R \\ & P_s^{(c)} \leq P_s \quad ; \quad P_r^{(c)} \leq P_r \end{aligned} \tag{10}$$

The optimal scheme for source energy efficiency S-EE is given by Algorithm III and combines two-hop relaying ( $D^{(s)}$ ), decode-forward ( $B^{(s)}$ ), partial decode-forward with beamforming ( $A^{(s)}$ ) and without ( $C^{(s)}$ ). Two-hop relaying and partial decode-forward without beamforming are optimal only for source

```

if  $|h_s|^2 \geq |h_d|^2$  then
   $R_B \leftarrow \theta \log_2 \left( 1 + \frac{|h_d|^2}{|h_s|^2} (2^{R/\theta} - 1) \right) + \bar{\theta} \log_2 \left( 1 + \frac{P_r |h_r|^2}{\theta N} \right)$ 
   $R_C \leftarrow \theta \log_2 \left( \frac{|h_s|^2}{|h_d|^2} \right)$ 
  Find  $\rho_1^* \in [0, 1/\theta]$  satisfying  $g_2(\rho_1^*) = 0$  where

    
$$g_2(s) = \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - 1 + g_3(s) \left( \frac{|h_s|^2}{|h_d|^2} \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} - 1 \right) \quad (11)$$


    and  $g_3(s) = \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{s P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} \quad (12)$ 

if  $R_B \leq R_C$  then
   $R_1^{(s)} \leftarrow R_B$ 
   $R_2^{(s)} \leftarrow \theta \log_2 \left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)$  or  $\infty$  if  $\rho_1^*$  does not exist
else
   $R_1^{(s)} \leftarrow R_C$ 
   $R_2^{(s)} \leftarrow \bar{\theta} \log_2 \left( \frac{P_r |h_r|^2}{\theta N} \right) - \bar{\theta} \log_2 \left( \frac{1}{\left(1 + \frac{\rho_1^* P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - \frac{1}{\left(1 + \frac{\rho_1^* P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}} \right)$  or  $\infty$  if  $\rho_1^*$ 
    does not exist
end if
if  $R \geq R_1^{(s)}$  and  $R \geq R_2^{(s)}$  then
  Use sub-scheme  $A^{(s)}$  given in Proposition 10;
else if  $R_1^{(s)} \leq R \leq R_2^{(s)}$  and  $R_B \leq R_C$  then
  Use sub-scheme  $B^{(s)}$  given in Proposition 9;
else if  $R_1^{(s)} \leq R \leq R_2^{(s)}$  and  $R_B \geq R_C$  then
  Use sub-scheme  $C^{(s)}$  given in Proposition 8;
else if  $R \leq R_1^{(s)}$  and  $R \leq R_2^{(s)}$  then
  Use sub-scheme  $D^{(s)}$  given in Proposition 7;
end if
else
  Use the direct link or declare outage if not feasible.
end if

```

ALGORITHM III: Optimal scheme for source energy efficiency, S-EE, solving (10)

energy but not for relay or network energy. Figure 4 depicts the sub-schemes that are applied given the source rate and the SD-link, as a function of the SR- and RD- links. The rate bounds  $R_1^{(s)}$  and  $R_2^{(s)}$  are closely related to the non-negativity constraints on  $\rho_2$  and  $\eta_2$ .

The optimal power allocations of sub-schemes  $D^{(s)}$ ,  $C^{(s)}$ ,  $B^{(s)}$  and  $A^{(s)}$  are given by Propositions 7, 8, 9 and 10 respectively. Also note that  $g_2$  and  $g_3$  of Algorithm III are the same in both S-EE and R-EE. The proof of optimal algorithm and power allocations can be found in Appendix C. In the following, we present each sub-scheme and power allocation going from low rates to high rates.

First, for very low rates, it is energy-efficient for the source to apply two-hop relaying, such that the

source only consumes energy during the first phase. However, contrary to simple routing, the destination is listening during both transmission phases. This corresponds to sub-scheme  $D^{(s)}$ .

**Proposition 7.** *For a given  $\theta$ , sub-scheme  $D^{(s)}$  is such that*

- *In Phase 1, the source sends  $m$*
- *In Phase 2, the relay sends  $\tilde{m}$  and the source keeps silent.*

*The optimal power allocation for sub-scheme  $D^{(s)}$  is as follows.*

$$\eta_1^\circ = \eta_2^\circ = \rho_2^\circ = 0 ; \quad \rho_1^\circ = \left(2^{R/\theta} - 1\right) \frac{N}{P_s |h_s|^2} ; \quad \rho_r^\circ = \frac{N}{P_r |h_r|^2} g_3(\rho_1^\circ)$$

*where  $g_3$  is defined by (12) of Algorithm III.*

If the rate increases, two-hop relaying is no longer energy-efficient for the source. In this case, either sub-scheme  $C^{(s)}$  or  $B^{(s)}$  is applied, depending on which of the SR- or RD-link is limiting.

On the one hand, if the SR-link is the bottleneck of the network, the second rate constraint  $R \leq I_2$  is the limiting one and the constraint on the relay allocation is relaxed. In this case,  $R_C \leq R_B$ , as defined in Algorithm III, and sub-scheme  $C^{(s)}$  is applied.

**Proposition 8.** *For a given  $\theta$ , sub-scheme  $C^{(s)}$  is such that*

- *In Phase 1, the source sends  $m_r$*
- *In Phase 2, the relay sends  $\tilde{m}_r$  and the source sends  $m_d$ .*

*The optimal power allocation for sub-scheme  $C^{(s)}$  is such that  $\eta_1^\dagger = \rho_2^\dagger = 0$  and*

$$\rho_1^\dagger = \frac{N}{P_s |h_s|^2} \left( 2^R \left( \frac{|h_s|^2}{|h_d|^2} \right)^{\bar{\theta}} - 1 \right) ; \quad \eta_2^\dagger = \rho_1^\dagger + \frac{N}{P_s} \left( \frac{1}{|h_s|^2} - \frac{1}{|h_d|^2} \right) ; \quad \rho_r^\dagger = \frac{N}{P_r |h_r|^2} g_3(\rho_1^\dagger)$$

*where  $g_3$  is defined by (12) of Algorithm III.*

In  $C^{(s)}$ , partial decode-forward without beamforming is applied. The source splits its message in two parts  $m_r$  and  $m_d$ , but does not send  $m_r$  again in the second phase. This sub-scheme is specific to S-EE. The RD-link is strong enough to carry all information contained in  $m_r$  by itself, thus the source saves energy by only sending new information ( $m_d$ ) during the second phase, and does not use the beamforming gain which is possible if both the source and the relay transmit in the second phase. Also note that, as the RD-link is not limiting, the relay does not necessarily use all its available power to transmit  $\tilde{m}_r$ .

On the other hand, if the RD-link is the bottleneck of the network ( $R_B \leq R_C$ ), the relay cannot support the transmission of  $\tilde{m}_r$  alone, even by transmitting with full power. In this case, the source should repeat the message  $m_r$  during the second phase, such that beamforming gain is obtained. Then,  $B^{(s)}$  is applied.

**Proposition 9.** *For a given  $\theta$ , sub-scheme  $B^{(s)}$  is such that*

- *In Phase 1, the source sends  $m$*
- *In Phase 2, the relay sends  $\tilde{m}$  and the source continues to send  $m$ .*

The optimal power allocation for sub-scheme  $B^{(s)}$  is  $\eta_1^\dagger = \eta_2^\dagger = 0$  and

$$\rho_r^\dagger = \frac{1}{\theta}; \quad \rho_1^\dagger = \left(2^{R/\theta} - 1\right) \frac{N}{P_s |h_s|^2}; \quad \rho_2^\dagger = \frac{N}{P_s |h_d|^2} \left( \sqrt{g_3(\rho_1^\dagger)} - \sqrt{\frac{P_r |h_r|^2}{\theta N}} \right)^2$$

Finally, if the source rate is very high, such that  $R \geq \max \{R_1^{(s)}, R_2^{(s)}\}$ , partial decode-forward with beamforming is required and sub-scheme  $A^{(s)}$  is applied.

**Proposition 10.** For a given  $\theta$ , sub-scheme  $A^{(s)}$  is such that

- In Phase 1, the source sends  $m_r$
- In Phase 2, the relay sends  $\tilde{m}_r$  and the source sends  $(m_r, m_d)$ .

The optimal power allocation set for sub-scheme  $A^{(s)}$  is such that  $\rho_1^*$  is first found numerically by solving  $g_2(\rho_1^*) = 0$  as defined by (11) of Algorithm III. Next,  $g_3(\rho_1^*)$  is computed using (12) and  $(\rho_r^*, \rho_2^*, \eta_1^*, \eta_2^*)$  are deduced from  $\rho_1^*$  and  $g_3(\rho_1^*)$  as follows:

$$\eta_1^* = 0; \quad \rho_r^* = \frac{1}{\theta}; \quad \eta_2^* = \left( \frac{2^{R/\theta}}{\left(1 + \frac{\rho_1^* P_s |h_s|^2}{N}\right)^{\theta/\theta}} - 1 \right) \frac{N}{P_s |h_d|^2}; \quad \rho_2^* = \frac{N}{P_s |h_d|^2} \left( \sqrt{g_3(\rho_1^*)} - \sqrt{\frac{P_r |h_r|^2}{\theta N}} \right)^2$$

This sub-scheme is similar to  $A^{(n)}$  and  $A^{(r)}$ , but with different power allocation. Even if the relay already transmits with full power, the RD-link is still too weak to support the transmission of  $m_r$  alone. Thus, the source repeats the message  $m_r$  during the second phase to obtain beamforming gain. Moreover, contrary to  $B^{(s)}$ , the SR-link is also too weak to support the transmission of the whole source message. Thus, part of the message is also transmitted only via the direct link ( $m_d$ ).

Considering scheme S-EE as function of the source rate, S-EE is composed of either  $(D^{(s)}, B^{(s)}, A^{(s)})$  or  $(D^{(s)}, C^{(s)}, A^{(s)})$ , in this order, depending on which link is the bottleneck of the network. Due to power constraints and channel gains, S-EE can be composed of less than three sub-schemes and outage can occur with any sub-scheme  $D^{(s)}$ ,  $C^{(s)}$ ,  $B^{(s)}$  or  $A^{(s)}$ . First, when the gain of  $h_d$  is close to the gain of  $h_s$ ,  $D^{(s)}$  may not exist. Indeed, even for low source rates,  $D^{(s)}$  under-uses in this case the direct link and is thus sub-optimal. Second, due to power constraints, outage can occur before the sequences  $(D^{(s)}, B^{(s)}, A^{(s)})$  and  $(D^{(s)}, C^{(s)}, A^{(s)})$  are completed, such that  $A^{(s)}$ ,  $B^{(s)}$  and  $C^{(s)}$  may not be applied. We describe the condition of existence of those sub-schemes. On the one hand, when the SR-link is the bottleneck of the network, S-EE is composed of only  $(D^{(s)}, C^{(s)})$  in most cases.  $A^{(s)}$  is only applied if the relay power  $P_r$  is very low compared to the source power  $P_s$ . On the other hand, when the network is severely limited by both the SD- and RD-links, S-EE is composed of only  $(D^{(s)}, B^{(s)})$ . Recall that, in  $B^{(s)}$ , the relay constraint is already met. Thus, if the direct link is weak given the source power constraint, the scheme rapidly goes in outage and cannot achieve very high rates. Finally, S-EE can also be reduced to  $D^{(s)}$  when the direct link is almost null.

| Channel conditions                            | Outage when | $R_{\max}$                                                                                                                                                 |
|-----------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weak SR-link and low $P_r$<br>or Weak RD-link | $A^{(s)}$   | $I_1$ in (3), with $\eta_1, \rho_1, \eta_2$ and $\rho_2$ of $A^{(s)}$ and $\rho_r = \frac{1}{\theta}$                                                      |
| Weak SD- and RD-links                         | $B^{(s)}$   | $I_1$ in (3), with $\eta_1, \rho_1, \eta_2$ and $\rho_2$ of $B^{(s)}$ and $\rho_r = \frac{1}{\theta}$                                                      |
| Weak SR-link                                  | $C^{(s)}$   | $\log_2 \left( \theta + \frac{ h_s ^2}{ h_d ^2} \bar{\theta} + \frac{P_s  h_s ^2}{N} \right) + \bar{\theta} \log_2 \left( \frac{ h_d ^2}{ h_s ^2} \right)$ |
| SD-link close to 0                            | $D^{(s)}$   | $\theta \log_2 \left( 1 + \frac{P_s  h_s ^2}{\theta N} \right)$                                                                                            |

TABLE I: Maximum achievable rate  $R_{\max}$ 

#### D. Comparison of the three optimal schemes

We now analyze the maximum rate feasible for the three proposed schemes. First, in N-EE, the source power constraint is always met with equality before the relay power constraint. Therefore, at the expense of consuming more total energy, schemes S-EE and R-E (which respectively minimize the source and the relay consumption) allow the source to reach higher rates than the maximal rate denoted,  $R_{\max}^{(n)}$ , achieved by scheme N-EE (which minimizes the network consumption). The proof is in Appendix D-A.

Second, analyzing the outage of scheme S-EE gives a comprehensive description of the maximum achievable rate  $R_{\max}$ . Outage is declared when the power constraints cannot be met any more given the source rate, which can occur with either  $A^{(s)}$ ,  $B^{(s)}$ ,  $C^{(s)}$  or  $D^{(s)}$ , as explained in Section III-C. For sub-schemes  $A^{(s)}$  and  $B^{(s)}$ , the relay power constraint is already met and scheme S-EE goes in outage as soon as the source power constraint is met. In this case, at  $R = R_{\max}$ , both power constraints are met. On the contrary, when sub-schemes  $C^{(s)}$  and  $D^{(s)}$  are applied, the relay power constraint is not limiting. Thus, S-EE goes in outage only when the source power constraint is met. In this case, the maximum achievable rate  $R_{\max}$  can be derived in closed-form. The values of  $R_{\max}$  are described in Table I. The proof is in Appendix D-B and Figure 6 gives an example of  $R_{\max}$ .

Finally, given individual power constraints and channel realizations, schemes S-EE and R-EE reach the same maximum achievable rate  $R_{\max}$  and have the same optimal power allocation at this rate. The proof is in Appendix D-C.

### IV. A GENERALIZED SCHEME FOR ENERGY EFFICIENCY (G-EE)

So far, we proposed three schemes N-EE, R-EE and S-EE with the corresponding optimal sets of power allocation that minimize respectively the network, the relay and the source energy consumption. We now propose a generalized scheme that combines these optimal power allocations in a smooth way.

#### A. Implementing a generalized scheme (G-EE)

We previously showed that minimizing the network power consumption (N-EE) is insufficient to describe the whole range of achievable rates and that R-EE and S-EE can increase this range.

```

if  $R \leq R^{(n)}$  then
    Apply  $B^{(n)}$  (decode-forward for network energy-efficiency)
else if  $R^{(n)} \leq R \leq R_{\max}^{(n)}$  then
    Apply  $A^{(n)}$  (partial decode-forward for network energy-efficiency)
else if  $R_{\max}^{(n)} \leq R \leq R_{\max}$  then
    Apply  $A^{(r)}$  (partial decode-forward for relay energy-efficiency)
else
    Declare outage
end if

```

ALGORITHM IV: Generalized optimal scheme for energy efficiency, G-EE

**Proposition 11.** *Considering power consumption as a function of the source rate, the resource allocation that minimizes the network consumption (N-EE) is extended beyond its maximal achievable rate  $R_{\max}^{(n)}$  by the allocation that minimizes the relay consumption (R-EE) in a continuous and differentiable manner.*

*Proof:* See Appendix E-A. ■

Therefore, we propose a generalized scheme that combines N-EE and R-EE and allows higher achievable rates. The generalized scheme (G-EE) optimal for energy-efficiency in the half-duplex relay channel is given by Algorithm IV.

#### B. Comparison between G-EE and rate-optimal scheme

As a reference, we consider the rate-optimal scheme proposed in [4]. This scheme is similar to  $A^{(n)}$  considering coding: the source performs message splitting, sending one part during phase 1, and both during phase 2. Then, the power allocation is numerically optimized to maximize the achievable rate.

**Proposition 12.** *In the perspective of energy, G-EE is also rate-optimal for the consumed energy considering the half-duplex relay channel with decode-forward. In the perspective of rate, given fixed individual power constraints, the maximum source rate  $R_{\max}$  achieved with energy minimization using G-EE is equal to the maximum rate achieved by rate maximization. This implies that only the combined scheme G-EE is equivalent to maximum-rate scheme.*

*Proof:* See Appendix E-B. ■

#### C. Discussion

Simulation results show that the generalized scheme G-EE and the maximum-rate scheme proposed in [4] lead to the same set of power allocation. One can argue that energy-minimization is therefore redundant considering maximum-rate scheme. However, we now show that G-EE brings two significant advantages over maximum-rate scheme.

From a practical point of view, maximum-rate schemes propose optimal but implicit power allocation which requires numerical search of the maximal solution for each transmission (convex optimization

problem). On the contrary, we presented in this paper a scheme G-EE which is both rate- and energy-optimal and for which we derived the optimal power allocation in closed-form.

From a theoretical point of view, the energy efficiency approach reveals far more details about sub-schemes and power allocation than the maximum-rate approach. First, we showed that minimizing the network energy consumption is not equivalent to maximizing the network capacity as often believed, since the whole range of source rates achievable with decode-forward cannot be covered. Second, we highlighted that several regimes of coding technique and power allocation exist (partial or full decode-forward) and each of them corresponds to a specific energy optimization problem (N-EE or R-EE).

## V. SIMULATION RESULTS

### A. Description of the simulation environment

We simulate the performance of the proposed schemes in a realistic environment and consider both pathloss and shadowing. Shadowing is the most severe random attenuation factor encountered in urban cellular environment [11]. It refers to mid-term channel variations which are due to the multipath propagation generated by obstructions between the transmitter and receiver. Since blocking objects do not vary rapidly in geographical position, size or dielectric properties, shadowing remains slow and predictable. Therefore, in our case, we can reasonably assume that channel gains are constant over the two transmission phases and that nodes can track those variations at each instant.

We consider the situation depicted in Figure 5. In a dense urban environment with high surrounding building, a mobile user (source S) sends data to a base station (destination D) with the help of a fixed relay station (relay R), as defined in LTE or Wimax. The mobile user is located outdoors, at street level. The relay station is below the top of surrounding building and the base station is far above the rooftop. This channel model corresponds to the Stationary Feeder scenario described in the European WINNER project [12]. Pathloss and shadowing effects are given by (4.23) of [12]:

$$PL = A \log_{10}(d[\text{m}]) + B + C \log_{10} \left( \frac{f_c[\text{GHz}]}{5.0} \right) + \chi$$

where  $d$  is the distance between the transmitter and receiver and  $f_c$  is the frequency carrier (within the range 2-6GHz).  $\chi$  refers to shadowing effect, it is modelled as a zero-mean log-normal random process, with standard deviation  $\sigma^2$ . The parameters  $A$ ,  $B$ ,  $C$  and  $\sigma^2$  depend on the global location of the transmitters and receivers (street level, rooftop...). Considering the relative positions of nodes and using notations of [12], the SR-link is modelled by scenario B1, the SD-link by C2 and the RD-link by B5f. Table II gives the distances transmitter-receiver, as well as the pathloss and shadowing parameters for each link. For simulations, we take  $f_c = 3.5\text{GHz}$ ,  $P_s = 100\text{mW}$ ,  $P_r = 200\text{mW}$ , which refers to a Wimax situation. We also consider  $\theta = 0.3$  and  $N = 10^{-10}\text{W}$ .

| Link | d[m] | $A$  | $B$  | $C$ | $\sigma^2$ |
|------|------|------|------|-----|------------|
| SR   | 70   | 22.7 | 41.0 | 20  | 3          |
| SD   | 100  | 26   | 39   | 20  | 4          |
| RD   | 30   | 23.5 | 57.5 | 23  | 8          |

TABLE II: Pathloss and shadowing parameters

### B. Reference Schemes

As reference schemes, we consider direct transmissions, two-hop transmissions and the maximum-rate scheme in [4]. Direct transmissions are one-phase communications. The source sends the message  $m$  with no splitting ( $m_d = m$  and  $m_r = 0$ ) and minimum power

$$\eta_D P_s = \frac{(2^R - 1) N}{|h_d|^2}.$$

In the classical two-hop routing, the source first sends the whole message to the relay, again without splitting, and with a minimum power  $\rho_{2H}^S P_s$ . If the relay can decode the message, it forwards to the destination with a power of  $\rho_{2H}^R P_r$ , where

$$\rho_{2H}^S P_s = \frac{(2^{R/\theta} - 1) N}{|h_s|^2} \quad ; \quad \rho_{2H}^R P_r = \frac{(2^{R/\bar{\theta}} - 1) N}{|h_r|^2}.$$

The maximum-rate scheme in [4] uses partial decode-forward with power allocation optimal for rate. Allocation is computed numerically solving a convex optimization problem. We then analyze the performance of the proposed schemes in both non-fading and fading environments.

### C. Performance in non fading environment

We first consider a non fading environment, where only pathloss is considered ( $\chi$  is set to zero). This can also be viewed as instantaneous performance.

Figures 6 and 7 respectively plot the total power and the per-node power needed to maintain a range of desired source rates. When a source rate is not achievable, an outage occurs, which is depicted by a cut-off in the curve. These figures illustrate the analysis of Section III-D. First, higher rates are achieved by optimizing only one node consumption (either the source as in S-EE, or the relay as in R-EE), rather than the whole network consumption (N-EE). Moreover, both schemes S-EE and R-EE achieve the same maximum source rate. Second, the combined scheme G-EE is also rate-optimal and significantly outperforms both direct and two-hop routing for every achievable source rate. For example, at a rate of 1.35 normalized b/s/Hz, 1.2dB of energy gain is obtained over direct transmissions and 4.5dB over two-hop routing. The gain comes mainly from lessening the relay power consumption. Note that at  $R = R_{\max}$ , the relay power constraint is not necessarily met with equality if rates beyond  $R_{\max}$  are

infeasible due to channel gains and rate constraints. Similarly, R-EE and S-EE provide significant power gain at the relay and the source respectively. Note that the maximum-rate scheme is neither source nor relay energy-efficient as it consumes more power at each respective node than the optimal scheme for that node.

Two-hop routing generally suffers from very high instantaneous power consumption. Since the whole message is sent twice by the source and the relay within the same time slot, both transmitters have to increase their transmit power to sustain the desired rate. We plot in Figure 8 the power consumed at each phase for the proposed and the reference schemes. We see that the proposed schemes allocate power in a smooth manner and reduce transmit power peaks. Contrary to routing, they spread energy more evenly over both phases and over both direct and relaying paths. Moreover, the consumption per phase as function of the source rate is similar to the direct transmission consumption. This can help managing interference in networks which allow both direct and relayed transmissions.

#### *D. Performance in fading environment*

We consider in this section both pathloss and shadowing. Due to random shadowing, there exists a non-zero probability that the channel gains are too weak to perform transmission. We plot in Figure 9 the average total network energy consumption. The cut-off in the curve depicts the maximum rate above which the outage probability is greater than 0.05. Simulations shows that the proposed schemes significantly reduce the average energy consumed, as well as increase the maximal achievable source rate, given outage requirement.

Finally, we analyze the utilization region of the proposed schemes and evaluate the energy gain as a function of the mobile user position, similarly to [6]. We consider the environment and heights of relay and base station as described in V-A. The mobile user is free to locate anywhere at street level. The relay station is located at the origin  $(0,0)$  and the destination at  $(20\sqrt{2},0)$  so that  $d_{RD} = 30\text{m}$ . As reference, we consider a combined scheme which uses either direct transmissions (DTx) or two-hop routing (RTx), depending on the total consumed energy. For simulations, equal time division is assumed, with a source rate of 1bit/s/Hz. Figures 10 and 11 respectively depict the power gain in dB realized by the proposed generalized scheme G-EE over the reference combined scheme and the outage gain (computed as the difference between the outage probabilities of the reference scheme and G-EE). Simulation shows that G-EE provides up to 2.2dB of energy gain, as well as it decreases the outage probability by up to 37.5%. G-EE is particularly beneficial at cell-edge, for both energy and outage.

## VI. CONCLUSION

We explore the issue of energy efficiency in relay channels and design a half-duplex coding scheme with optimal resource allocations that maintains a desired source rate and minimizes the energy consumption. We consider the network, the relay and the source consumption separately and then combine them into a generalized set of power allocation G-EE which is energy optimal for the relay channel.

We show that minimizing the network energy consumption is not equivalent to maximizing the network capacity as often believed, since the whole range of source rates achievable with decode-forward cannot be covered. This equivalence only holds for the proposed generalized scheme G-EE.

However, this energy efficiency approach remains meaningful since it allows a comprehensive description of the optimal coding (full or partial decode-forward, with or without beamforming) as well as closed-form solutions of the optimal power allocation, which remains implicit in maximum-rate schemes. Reversely, we highlighted that rate-optimal scheme is not energy-efficient for either node.

The generalized scheme G-EE gives a practical algorithm for message coding and associated power allocation to reach energy efficiency and rate optimality for each desired source rate and channel realization. Applied in cellular network, G-EE is particularly beneficial at cell-edge where up to 2.2dB energy gain can be obtained, as well as a reduction of 37.5% of the outage probability.

## APPENDIX A

### PROOF OF ALGORITHM I : POWER ALLOCATION FOR THE NETWORK ENERGY EFFICIENCY

#### A. General problem setting

Denote  $X = (\eta_1, \rho_1, \eta_2, \rho_2, \rho_r)^T$ . Consider optimization problem (4). We look for the  $X$  that minimizes the objective function  $f$ , such that

$$f(X) = \omega_s [\theta (\eta_1 + \rho_1) P_s + \bar{\theta} (\eta_2 + \rho_2) P_s] + \omega_r \bar{\theta} \rho_r P_r$$

given the two rate constraints  $c_1(X) = I_1 - R$  and  $c_2(X) = I_2 - R$ , as defined in (3). Here, we first ignore the power constraints. The Lagrangian can then be formed as

$$\mathcal{L} = f(X) - \lambda_1 c_1(X) - \lambda_2 c_2(X)$$

Assuming natural logarithms does not change the optimal solution. The KKT conditions are expressed by equations (13) - (18).

$$\lambda_i c_i(X) = 0 ; \quad c_i(X) \geq 0 ; \quad \lambda_i \geq 0 ; \quad i = 1, 2 \quad (13)$$

$$\frac{\partial \mathcal{L}}{\partial \eta_1} = \omega_s \theta P_s - \frac{\lambda_1 \theta \frac{P_s |h_d|^2}{N}}{\left(1 + \frac{(\eta_1 + \rho_1) P_s |h_d|^2}{N}\right)} - \frac{\lambda_2 \theta P_s}{N} \left( \frac{|h_s|^2}{\left(1 + \frac{(\eta_1 + \rho_1) P_s |h_s|^2}{N}\right)} - \frac{|h_s|^2}{\left(1 + \frac{\eta_1 P_s |h_s|^2}{N}\right)} + \frac{|h_d|^2}{\left(1 + \frac{\eta_1 P_s |h_d|^2}{N}\right)} \right) = 0 \quad (14)$$

$$\frac{\partial \mathcal{L}}{\partial \rho_1} = \omega_s \theta P_s - \lambda_1 \frac{\theta \frac{P_s |h_d|^2}{N}}{\left(1 + \frac{(\eta_1 + \rho_1) P_s |h_d|^2}{N}\right)} - \lambda_2 \frac{\theta P_s}{N} \frac{|h_s|^2}{\left(1 + \frac{(\eta_1 + \rho_1) P_s |h_s|^2}{N}\right)} = 0 \quad (15)$$

$$\frac{\partial \mathcal{L}}{\partial \eta_2} = \omega_s \bar{\theta} P_s - \lambda_1 \bar{\theta} \frac{\frac{P_s |h_d|^2}{N}}{\left(1 + \frac{(\eta_2 + \rho_2) P_s |h_d|^2 + |h_r|^2 \rho_r P_r + 2\sqrt{P_s |h_d|^2 P_r |h_r|^2 \rho_2 \rho_r}}{N}\right)} - \lambda_2 \bar{\theta} \frac{\frac{P_s |h_d|^2}{N}}{\left(1 + \frac{\eta_2 P_s |h_d|^2}{N}\right)} = 0 \quad (16)$$

$$\frac{\partial \mathcal{L}}{\partial \rho_2} = \omega_s \bar{\theta} P_s - \lambda_1 \bar{\theta} \frac{\frac{P_s |h_d|^2}{N} \left(1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}}\right)}{\left(1 + \frac{(\eta_2 + \rho_2) P_s |h_d|^2 + |h_r|^2 \rho_r P_r + 2\sqrt{P_s |h_d|^2 P_r |h_r|^2 \rho_2 \rho_r}}{N}\right)} = 0 \quad (17)$$

$$\frac{\partial \mathcal{L}}{\partial \rho_r} = \omega_r \bar{\theta} P_r - \lambda_1 \bar{\theta} \frac{\frac{P_r |h_r|^2}{N} \left(1 + \sqrt{\frac{P_s |h_d|^2 \rho_2}{P_r |h_r|^2 \rho_r}}\right)}{\left(1 + \frac{(\eta_2 + \rho_2) P_s |h_d|^2 + |h_r|^2 \rho_r P_r + 2\sqrt{P_s |h_d|^2 P_r |h_r|^2 \rho_2 \rho_r}}{N}\right)} = 0 \quad (18)$$

### B. Transmission during the first phase

Note that  $\frac{\partial \mathcal{L}}{\partial \eta_1}$  and  $\frac{\partial \mathcal{L}}{\partial \rho_1}$  cannot be equal to zero simultaneously, unless  $|h_d|^2 = |h_s|^2$ . Therefore, we have to relax either  $\rho_1$  or  $\eta_1$ . Because  $|h_d|^2 < |h_s|^2$ , we get  $\frac{\partial \mathcal{L}}{\partial \eta_1} > \frac{\partial \mathcal{L}}{\partial \rho_1}$ . Relaxing  $\eta_1$  gives  $\frac{\partial \mathcal{L}}{\partial \eta_1} > 0$  when  $\frac{\partial \mathcal{L}}{\partial \rho_1} = 0$ , and  $\eta_1$  should be minimized. Since the objective function and the first constraint  $c_1(X)$  only depend on the sum  $\eta_1 + \rho_1$ , setting  $\eta_1 = 0$  weakens the second constraint  $c_2(X)$  and minimizes  $f$ . Thus, the source only sends  $m_r$  during the first phase.

The following notation will be used for the rest of this appendix and the following ones:

$$\Gamma_i = 1 + \frac{\rho_1 P_s |h_i|^2}{N} \quad ; \quad G_i = \frac{2^{R/\bar{\theta}}}{\Gamma_i^{\theta/\bar{\theta}}} \quad \text{where } i \in \{s, d\}$$

$$\Gamma_r = 1 + \frac{(\eta_2 + \rho_2) P_s |h_d|^2 + |h_r|^2 \rho_r P_r + 2\sqrt{P_s |h_d|^2 P_r |h_r|^2 \rho_2 \rho_r}}{N}$$

### C. Optimal allocation set for network energy efficiency

In this case, both  $\omega_s$  and  $\omega_r$  are equal to 1. First, from (17) and (18), we get:

$$\lambda_1 = \Gamma_r \left[ \frac{|h_d|^2}{N} \left(1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}}\right) \right]^{-1} \quad \text{and} \quad \lambda_1 = \Gamma_r \left[ \frac{|h_r|^2}{N} \left(1 + \sqrt{\frac{P_s |h_d|^2 \rho_2}{P_r |h_r|^2 \rho_r}}\right) \right]^{-1} \quad \text{which leads to}$$

$$\frac{|h_d|^2}{|h_r|^2} = \sqrt{\frac{P_s |h_d|^2 \rho_2}{P_r |h_r|^2 \rho_r}} \Leftrightarrow \rho_2 = \frac{P_r |h_d|^2}{P_s |h_r|^2} \rho_r. \quad (19)$$

As  $\lambda_1 > 0$ , the first constraint is active and

$$G_d = \Gamma_r \Leftrightarrow \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1 P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} = 1 + \frac{\eta_2 P_s |h_d|^2}{N} + \frac{\left(\sqrt{P_s |h_d|^2 \rho_2} + \sqrt{P_r |h_r|^2 \rho_r}\right)^2}{N} \quad (20)$$

With (19), we get

$$G_d = 1 + \frac{\eta_2 P_s |h_d|^2}{N} + P_r \rho_r |h_r|^2 \left( \frac{|h_d|^2}{|h_r|^2} + 1 \right)^2 \quad (21)$$

From (16), we get  $\lambda_2 = \left(1 - \frac{1}{1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}}}\right) \frac{N}{|h_d|^2} \left(1 + \frac{\eta_2 P_s |h_d|^2}{N}\right) > 0$ . Thus, the second constraint is also active and we get

$$\frac{\eta_2 P_s |h_d|^2}{N} = G_s - 1 \quad (22)$$

From (19), (21) and (22), we write  $\rho_2$ ,  $\rho_r$  and  $\eta_2$  as functions of  $\rho_1$ . Replacing the Lagrangian multipliers  $\lambda_1$  and  $\lambda_2$  in (15), we prove that  $\rho_1$  solves  $g_1(\rho_1) = 0$ , where  $g_1$  is defined by (6) of Algorithm I.

Now, we focus on the existence of this solution. First,  $\rho_r > 0$  and  $\rho_2 > 0$  since  $|h_s|^2 > |h_d|^2$  by assumption. Second,  $\eta_2 > 0$  as long as  $R \geq \theta \log_2 \left( 1 + \frac{\rho_1 P_s |h_s|^2}{N} \right) = R^{(n)}$ . Third, note that  $g_1$  is decreasing in  $\rho_1$ , increasing in  $R$  and that  $g_1(0) = \frac{|h_s|^2 |h_r|^2 + |h_d|^4}{|h_d|^2 |h_r|^2 + |h_d|^4} 2^{R/\bar{\theta}} - 1 > 0$  for all  $R$ . We would like to find a  $\rho_1^*$  such that  $g_1(\rho_1^*) \leq 0$ . If so, there exists a  $\rho_1 \in [0, \rho_1^*]$  such that  $g_1(\rho_1) = 0$ . Let's consider the maximal  $\rho_1^*$  satisfying the source power constraint. We can show that as long as

$$R \leq \bar{\theta} \log_2 \left( \frac{(|h_d|^2 + |h_r|^2) \left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)^{1/\bar{\theta}} \left( 1 + \frac{\rho_1^* P_s |h_d|^2}{N} \right)^{1/\bar{\theta}}}{\frac{|h_s|^2 |h_r|^2}{|h_d|^2} \left( 1 + \frac{\rho_1^* P_s |h_d|^2}{N} \right)^{1/\bar{\theta}} + |h_d|^2 \left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)^{1/\bar{\theta}}} \right),$$

we have  $g_1(\rho_1^*) \leq 0$ . Finally, we plug the obtained solutions into the power constraints; if they are not satisfied, then the desired source rate is infeasible. This completes the proof of Proposition 2.

When  $R \leq R^{(n)}$ ,  $\eta_2$  is negative and there is no solution for (22). Thus, we relax  $\eta_2$  and rewrite the optimization. Following the same steps as above, we can show that constraints are still active, and that (15), (17) and (18) still hold. This leads to Proposition 3 and concludes the proof of Algorithm I.

## APPENDIX B

### PROOF OF ALGORITHM II : POWER ALLOCATION FOR RELAY ENERGY EFFICIENCY

The proof of Algorithm II and Propositions 4, 6 and 5 follows the same main steps as in Appendix A. Here,  $\omega_s = 0$  and  $\omega_r = 1$ . Analysis in Appendices A-A and A-B still holds. To minimize the energy consumption of the relay, direct transmissions should be performed as long as the direct link is not in outage, or equivalently as long as  $R \leq \log_2 \left( 1 + \frac{P_s |h_d|^2}{N} \right)$  (Proposition 4).

The relay is needed to perform the transmission as soon as the source meets its power constraint and cannot send more data without going in outage. Then,

$$\rho_2 = \frac{1 - \rho_1 \theta}{\bar{\theta}} - \eta_2. \quad (23)$$

First, note that Eq.  $\frac{\partial \mathcal{L}}{\partial \rho_r} = 0$  (18) is still valid. Thus  $\lambda_1 = \Gamma_r \left[ \frac{|h_r|^2}{N \ln 2} \left( 1 + \sqrt{\frac{P_s |h_d|^2 \rho_2}{P_r |h_r|^2 \rho_r}} \right) \right]^{-1}$ . Second, with (23), the Lagrangian equations now satisfy

$$\frac{\partial \mathcal{L}}{\partial \eta_2} = \lambda_1 \frac{\bar{\theta} P_s |h_d|^2}{N \Gamma_d \ln 2} - \lambda_1 \bar{\theta} \frac{P_s |h_d|^2}{N \ln 2 \Gamma_r} + \lambda_2 \frac{\bar{\theta} P_s |h_s|^2}{N \Gamma_s \ln 2} - \lambda_2 \bar{\theta} \frac{P_s |h_d|^2}{N \left( 1 + \frac{\eta_2 P_s |h_d|^2}{N} \right) \ln 2} = 0 \quad (24)$$

$$\frac{\partial \mathcal{L}}{\partial \rho_2} = \lambda_1 \frac{\bar{\theta} P_s |h_d|^2}{N \Gamma_d \ln 2} - \lambda_1 \bar{\theta} \frac{P_s |h_d|^2 \left( 1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}} \right)}{N \ln 2 \Gamma_r} + \lambda_2 \frac{\bar{\theta} P_s |h_s|^2}{N \Gamma_s \ln 2} = 0 \quad (25)$$

Subtracting (24) from (25), we get

$$\lambda_2 = \lambda_1 \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}} \left( 1 + \frac{\eta_2 P_s |h_d|^2}{N} \right) \Gamma_r^{-1} = \frac{N}{|h_r|^2} \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}} \frac{\left( 1 + \frac{\eta_2 P_s |h_d|^2}{N} \right)}{\left( 1 + \sqrt{\frac{P_s |h_d|^2 \rho_2}{P_r |h_r|^2 \rho_r}} \right)} > 0$$

Both constraints are active: Eq.  $G_d = \Gamma_r$  (20) and Eq.  $\frac{\eta_2 P_s |h_d|^2}{N} = G_s - 1$  (22) still hold. From (22),  $\eta_2$ , is expressed as a function of  $\rho_1$ . From (20), (23) and the expression of  $\eta_2$ ,  $\rho_r$  can be also written as a function of  $\rho_1$ .

Finally, plugging the expressions of  $\lambda_1$  and  $\lambda_2$  in (20), (22) into (25), we prove that  $\rho_1$  should satisfy  $g_2(\rho_1) = 0$ , as defined by (8) of Algorithm II, with

$$g_3(\rho_1) = \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}} = \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1 P_s |h_d|^2}{N}\right)^{\theta/\bar{\theta}}} - \frac{2^{R/\bar{\theta}}}{\left(1 + \frac{\rho_1 P_s |h_s|^2}{N}\right)^{\theta/\bar{\theta}}}$$

Now, we focus on the existence of this power allocation set. First, to ensure  $\eta_2 > 0$ ,  $R$  must be greater than  $\theta \log_2 \left(1 + \frac{\rho_1 P_s |h_s|^2}{N}\right) = R_2^{(r)}$ . Moreover,  $\rho_r$  is positive as long as  $R > \theta \log_2 \left(1 + \frac{\rho_1 P_s |h_d|^2}{N}\right) + \bar{\theta} \log_2 \left(1 + \frac{(\eta_2 + \rho_2) P_s |h_d|^2}{N}\right) = \log_2 \left(1 + \frac{P_s |h_d|^2}{N}\right) = R_1^{(r)}$ . Finally, the existence of  $\rho_1$ , and consequently of  $\rho_2$ , follows the same steps as in Appendix A. This concludes the proof of Proposition 6.

When  $R < \theta \log_2 \left(1 + \frac{\rho_1 P_s |h_s|^2}{N}\right)$ ,  $\eta_2$  is negative and there is no solution for (22). In this case, we relax  $\eta_2$  and rewrite the optimization problem. As above, we can show that rate constraints are still active, and that (18) and (25) still hold. This concludes the proof of Proposition 5 and Algorithm II.

## APPENDIX C

### PROOF OF ALGORITHM III : POWER ALLOCATION FOR SOURCE ENERGY EFFICIENCY

The proof of Algorithm III and Propositions 8, 9 and 10 follows the same steps as in Appendix A. Here,  $\omega_s = 1$  and  $\omega_r = 0$ . Analysis of Lagrangian in A-A and A-B still holds. However, the constraint on the relay consumption is relaxed here, such that it can consume up to its maximal power.

First, let's consider that the source rate is high and that all the available relay power is required ( $\rho_r = \frac{1}{\bar{\theta}}$ ). This means that the first rate constraint, which depends on  $\rho_r$  will necessarily be tight. From Eq.  $\frac{\partial \mathcal{L}}{\partial \rho_1} = 0$  (15) and Eq.  $\frac{\partial \mathcal{L}}{\partial \rho_2} = 0$  (17), we can prove that both Lagrangian multipliers are positive, meaning that both constraints are active, such that

$$\lambda_1 = \frac{\Gamma_r}{\frac{|h_d|^2}{N} \left(1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}}\right)} = G_d \frac{N}{|h_d|^2 \left(1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}}\right)}$$

$$\lambda_2 = \left(1 - \frac{\lambda_1 |h_d|^2}{N \ln 2 \Gamma_d}\right) \frac{N \ln 2 \Gamma_s}{|h_s|^2} = \left(1 - \frac{G_d}{\left(1 + \sqrt{\frac{P_r |h_r|^2 \rho_r}{P_s |h_d|^2 \rho_2}}\right)}\right) \frac{N \ln 2 \Gamma_s}{|h_s|^2}$$

Plugging in these expressions of  $\lambda_1$  and  $\lambda_2$ , as well as Eq.  $G_d = \Gamma_r$  (20) and Eq.  $\frac{\eta_2 P_s |h_d|^2}{N} = G_s - 1$  (22) into (17), we prove that  $\rho_1$  should satisfy  $g_2(\rho_1) = 0$ , as defined by (11) of Algorithm III. The existence of this power allocation set follows the same steps as for Appendices A and B. This leads to sub-scheme  $A^{(s)}$  and Proposition 10. Note that the power allocation is similar to sub-scheme  $A^{(r)}$ . We now have to insure the non-negativity of this solution, in particular  $\eta_2 \geq 0$  and  $\rho_2 \geq 0$ .

On the one hand, we consider the non-negativity constraint on  $\eta_2$ .  $\eta_2$  is positive following sub-scheme  $A^{(s)}$  as long as  $R \geq R_{2,B}^{(s)}$  with  $R_{2,B}^{(s)} = \theta \log_2 \left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)$ . If  $R \leq R_{2,1}^{(s)}$ ,  $\eta_2$  is relaxed and set to 0. Next, the optimization follows the same steps as for  $B^{(n)}$  or  $B^{(r)}$ , but with  $\rho_r = \frac{1}{\theta}$ . This leads to sub-scheme  $B^{(s)}$  and Proposition 9. Note that, following  $B^{(s)}$ ,  $\rho_2$  is positive as long as  $R \geq R_{1,B}^{(s)}$ , with  $R_{1,B}^{(s)} = R_B$  as defined in Algorithm III. This means that the relay requires all its power to forward the source data such that the first rate constraint  $c_1$  is active. However, if the rate decreases under the threshold  $R_{1,B}^{(s)}$ , the relay may not need all its available power and the first rate constraint becomes inactive.  $\rho_2$  is relaxed and set to 0. Finally, even if the relay consumption is not part of the optimization problem here, we can nevertheless reduce it to the minimum required, such that  $R = R_1^{(s)}$  (however,  $c_1$  is still inactive in the sense of Lagrangian optimization). Thus, we deduce the expression of  $\rho_r < 1/\bar{\theta}$ . The optimization now leads to sub-scheme  $D^{(s)}$  and Proposition 7.

On the other hand and following sub-scheme  $A^{(s)}$  again, we consider the non-negativity constraint on  $\rho_2$  (with  $\eta_2 > 0$ ).  $\rho_2$  is positive following sub-scheme  $A^{(s)}$  as long as  $R \geq R_{2,C}^{(s)}$  with  $R_{2,C}^{(s)} = \bar{\theta} \log_2 \left( \frac{P_r |h_r|^2}{\theta N} \right) - \bar{\theta} \log_2 \left( \frac{1}{\left( 1 + \frac{\rho_1^* P_s |h_d|^2}{N} \right)^{\theta/\bar{\theta}}} - \frac{1}{\left( 1 + \frac{\rho_1^* P_s |h_s|^2}{N} \right)^{\theta/\bar{\theta}}} \right)$ . If  $R \leq R_{2,C}^{(s)}$ ,  $\rho_2$  is relaxed and set to 0. This also means that the relay is able to forward the source data without requiring the beamforming gain between the source and the relay. Therefore, the first rate constraint  $c_1$  becomes inactive and  $\lambda_1 = 0$ . From Eq.  $\frac{\partial \mathcal{L}}{\partial \rho_1} = 0$  (15) and Eq.  $\frac{\partial \mathcal{L}}{\partial \eta_2} = 0$  (16), we get  $\frac{|h_s|^2}{1 + \frac{\rho_1 P_s |h_s|^2}{N}} = \frac{|h_d|^2}{1 + \frac{\eta_2 P_s |h_d|^2}{N}}$ , such that  $\eta_2 = \rho_1 + \frac{N}{P_s} \left( \frac{1}{|h_s|^2} - \frac{1}{|h_d|^2} \right)$ . As the second constraint  $c_2$  is active, Eq.  $\frac{\eta_2 P_s |h_d|^2}{N} = G_s - 1$  (22) is still valid and we get  $\eta_2 = \frac{N}{P_s |h_d|^2} \left( \frac{2^{R/\bar{\theta}}}{\left( 1 + \frac{\rho_1 P_s |h_s|^2}{N} \right)^{\theta/\bar{\theta}}} - 1 \right)$ . By equalizing both expressions of  $\eta_2$ , we deduce  $\rho_1$ . Next, even if the relay consumption is not considered here, we reduced it to its minimum required value. The optimization leads to sub-scheme  $C^{(s)}$  and Proposition 8. Now, following  $C^{(s)}$ ,  $\eta_2$  is positive as long as  $R \geq R_{1,C}^{(s)}$ , with  $R_{1,C}^{(s)} = R_C$  as defined in Algorithm III. If the rate decreases under the threshold  $R_{1,C}^{(s)}$ ,  $\eta_2$  is relaxed and set to 0, which leads to  $D^{(s)}$  as previously defined.

So far, depending on non-negativity constraints, we defined two possible sequences of sub-schemes:  $(A^{(s)}, B^{(s)}, D^{(s)})$  and  $(A^{(s)}, C^{(s)}, D^{(s)})$ . We now define how each of them should be used. First,  $A^{(s)}$  is applied when  $R \geq \max \{ R_{2,B}^{(s)}, R_{2,C}^{(s)} \} = R_2^{(s)}$ . If  $R_{2,C}^{(s)} \leq R_{2,B}^{(s)}$ , the non-negativity constraint on  $\eta_2$  is stronger than the constraint on  $\rho_2$  and the sequence  $(A^{(s)}, B^{(s)})$  is applied. Otherwise,  $(A^{(s)}, C^{(s)})$  is applied. Second,  $D^{(s)}$  is such that  $\eta_2 = 0$  and  $\rho_2 = 0$ . This sub-scheme is applied as long as  $R \leq \min \{ R_{1,B}^{(s)}, R_{1,C}^{(s)} \} = R_1^{(s)}$ . Thus, if  $R_{1,B}^{(s)} \leq R_{1,C}^{(s)}$ , the sequence  $(B^{(s)}, D^{(s)})$  is applied, otherwise  $(C^{(s)}, D^{(s)})$  is applied. Now, we show that those rate conditions are consistent. Considering the source consumption as a function of the source rate, sub-schemes are continuous. Moreover,  $\eta_2$  and  $\rho_2$  are increasing functions of the source rate. Thus, if  $R_{1,B}^{(s)} \leq R_{1,C}^{(s)}$  and sequence  $(D^{(s)}, B^{(s)})$  is applied for low source rates, we get  $\rho_2 > 0$  for any  $R > R_{1,B}^{(s)}$ . In this case, we necessarily have  $R > R_{2,C}^{(s)}$  which implies  $R_{2,C}^{(s)} \leq R_{2,B}^{(s)}$ . Therefore, only sequence  $(A^{(s)}, B^{(s)}, D^{(s)})$  can occur. Similarly, we can show that

only  $(A^{(s)}, C^{(s)}, D^{(s)})$  can occur if  $R_{1,B}^{(s)} \geq R_{1,C}^{(s)}$ . This completes the proof of Algorithm III.

## APPENDIX D

### MAXIMAL ACHIEVABLE SOURCE RATE

#### A. R-EE and S-EE achieve higher rates than N-EE

A source rate  $R$  is achievable for N-EE (resp. R-EE) as long as there exists a  $\rho_1^*$  satisfying  $g_1(\rho_1^*) = 0$  (resp.  $g_2(\rho_1^*) = 0$ ). Recall that  $g_1(0) > 0$ ,  $g_2(0) > 0$  and that both functions are decreasing (see Appendix A). Since  $\forall x, g_2(x) < g_1(x)$ , there exists a range of  $\rho_1$  for which  $g_1(\rho_1) > 0$  but  $g_2(\rho_1) \leq 0$ . Therefore, for this range, we can find a solution for  $g_2(\rho_1^*) = 0$  but not for  $g_1(\rho_1^*) = 0$ . The corresponding range of source rates is thus achieved with R-EE, but not with N-EE. The proof is similar for S-EE.

#### B. Derivation of $R_{\max}$ with sub-schemes $D^{(s)}$ and $C^{(s)}$

If sub-scheme  $D^{(s)}$  is applied when S-EE goes in outage, the source power constraint is met, such that  $(\rho_1^\circ + \eta_1^\circ)\theta P_s + (\rho_2^\circ + \eta_2^\circ)\bar{\theta}P_s = P_s$ . This leads to  $\rho_1^\circ = \frac{1}{\bar{\theta}}$  and  $R_{\max} = \theta \log_2 \left( 1 + \frac{P_s |h_s|^2}{\bar{\theta} N} \right)$ .

Similarly, if sub-scheme  $C^{(s)}$  is applied when S-EE goes in outage,  $(\rho_1^\dagger + \eta_1^\dagger)\theta P_s + (\rho_2^\dagger + \eta_2^\dagger)\bar{\theta}P_s = P_s$ . Thus,  $\theta \rho_1^\dagger + \bar{\theta} \left( \rho_1^\dagger + \frac{N}{P_s} \left( \frac{1}{|h_s|^2} - \frac{1}{|h_d|^2} \right) \right) = 1$  and  $\rho_1^\dagger = 1 + \frac{\bar{\theta} N}{P_s} \left( \frac{1}{|h_d|^2} - \frac{1}{|h_s|^2} \right) = \frac{N}{P_s |h_s|^2} \left( 2^R \left( \frac{|h_s|^2}{|h_d|^2} \right)^{\bar{\theta}} - 1 \right)$ , from which we deduce  $R_{\max}$  as in Section III-D.

#### C. S-EE and R-EE achieve the same maximum rate $R_{\max}$

We want to prove that the power allocation of S-EE for  $R = R_{\max}$  corresponds to the allocation of R-EE at this specific rate such that both achieve the same maximum rate  $R_{\max}$ . Also note that as long as  $|h_s|^2 > |h_d|^2$ , the maximum rate achieved by R-EE using  $C^{(r)}$  (direct transmission) is strictly lower to the maximum rate achieved by R-EE using  $B^{(r)}$  or  $A^{(r)}$ . Thus, when R-EE declares outage, either sub-scheme  $B^{(r)}$  or  $A^{(r)}$  is applied. Now, we successively consider the four possible cases for S-EE.

First, assume that  $A^{(s)}$  is applied when S-EE goes in outage at  $R = R_{\max}$ . This means that  $R \geq \theta \log_2 \left( 1 + \frac{\rho_1 P_s |h_s|^2}{N} \right)$  where  $\rho_1$  solves  $g_2(\rho_1) = 0$ . Therefore, R-EE uses  $A^{(r)}$  at this rate and  $\rho_1^{(r)} = \rho_1^{(s)}$ . Now, note that  $\eta_2^{(r)} = \eta_2^{(s)}$ , since both solve the same expression. For R-EE,  $\rho_2^{(r)} = \frac{1 - \rho_1^{(r)} \theta}{\bar{\theta}}$  and S-EE declares outage when the source power constraint is met. Thus,  $\rho_2^{(r)} = \rho_2^{(s)}$  at  $R = R_{\max}$ . Noting that  $\rho_2$  and  $\rho_r$  satisfy the same equation in both R-EE and S-EE  $\Gamma_r = G_d$ , we get  $\rho_r^{(r)} = \rho_r^{(s)} = 1/\bar{\theta}$ , which means that the relay constraint is also achieved and R-EE goes in outage for this same source rate.

Second, assume that  $B^{(s)}$  is used when S-EE goes in outage. This means that  $R \leq \theta \log_2 \left( 1 + \frac{\rho_1 P_s |h_s|^2}{N} \right)$  where  $\rho_1$  solves  $g_2(\rho_1) = 0$  and that R-EE uses  $B^{(r)}$  when outage occurs. Similarly to the above analysis, we can show that the power allocation of S-EE for  $R = R_{\max}$  corresponds to the allocation of R-EE at this specific rate.

Third, we assume that  $C^{(s)}$  is used when S-EE goes in outage. In this case, we have

$$\begin{aligned} R_{\max} &= \log_2 \left( \theta \left( 1 + \frac{P_s |h_s|^2}{N\theta} \right) + \bar{\theta} \frac{|h_s|^2}{|h_d|^2} \right) - \bar{\theta} \log_2 \left( \frac{|h_s|^2}{|h_d|^2} \right) \\ &\geq \theta \log_2 \left( 1 + \frac{P_s |h_s|^2}{N\theta} \right) + \bar{\theta} \log_2 \left( \frac{|h_s|^2}{|h_d|^2} \right) - \bar{\theta} \log_2 \left( \frac{|h_s|^2}{|h_d|^2} \right) \text{ by concavity} \\ &= \theta \log_2 \left( 1 + \frac{P_s |h_s|^2}{N\theta} \right) \end{aligned}$$

Thus, for all  $\rho_1 \leq \frac{1}{\theta}$  solving  $g_2(\rho_1) = 0$ , we get  $R_{\max} \geq \theta \log_2 \left( 1 + \frac{\rho_1 P_s |h_s|^2}{N} \right)$  such that at  $R = R_{\max}$ , R-EE uses  $A^{(r)}$ . Note that S-EE declares outage using  $C^{(s)}$  if the source rate is met, such that  $\eta_2^{(s)} = \frac{(1-\rho_1^{(s)})\theta}{\theta}$ . Thus, we can show that the allocation of S-EE is also a solution for  $A^{(r)}$  at this specific source rate. Similar analysis can be done for  $D^{(s)}$ .

Therefore, for all cases, the power allocation of S-EE for  $R = R_{\max}$  corresponds to the allocation of R-EE at this specific rate and both S-EE and R-EE achieve the same maximum rate  $R_{\max}$ .

## APPENDIX E

### ANALYSIS OF SCHEME G-EE

#### A. Continuity and Differentiability

First, we show the continuity of both schemes N-EE and R-EE at  $R = R_{\max}^{(n)}$ . Note that  $\eta_1$  and  $\eta_2$  solve the same equations for both sub-schemes  $A^{(n)}$  and  $A^{(r)}$ . Then, since the first rate constraint is active, we get  $g_3(\rho_1^*) = \sqrt{\frac{P_r |h_r|^2 \rho_r^*}{P_s |h_d|^2 \rho_2^*}}$ . In  $A^{(n)}$ ,  $g_3(\rho_1^*) = \frac{|h_r|^2}{|h_d|^2}$ , such that  $\rho_1^*$  and  $\rho_r^*$  of  $A^{(n)}$  are also optimal for  $A^{(r)}$ . Finally, at  $R = R_{\max}^{(n)}$ , the source power constraint is met, such that  $\rho_2^* = \frac{(1-\rho_1^*)\theta}{\theta} - \eta_2^*$  for both sub-schemes. Therefore, the optimal power allocation set for  $A^{(n)}$  is also optimal for  $A^{(r)}$  at this particular rate and schemes N-EE and R-EE are continuous.

Second, note that parameters  $\rho_1$ ,  $\eta_2$ ,  $\rho_2$  and  $\rho_r$  are not differentiable themselves at  $R = R_{\max}^{(n)}$ , but that the energy of G-EE (the weighted sum of  $\rho_1$ ,  $\eta_2$ ,  $\rho_2$  and  $\rho_r$ ) is differentiable. To prove it, let's consider the left and right derivatives of G-EE. The left derivative (resp. the right derivative) corresponds to the derivative of the total energy consumed by N-EE (resp. R-EE) at  $R = R_{\max}^{(n)}$ . If both semi-derivatives are equal, then G-EE is differentiable at this source rate. Let's write both as functions of  $\frac{\partial \rho_1}{\partial R}$ ,  $\frac{\partial G_s}{\partial R}$  and  $\frac{\partial G_d}{\partial R}$ . Also note that  $\frac{\partial G_i}{\partial R} = \frac{\ln 2}{\theta} G_i - \frac{\theta P_s |h_s|^2}{\theta N_0} \frac{G_i}{\Gamma_i} \frac{\partial \rho_1}{\partial R}$ .

Let's consider the left derivative (scheme N-EE). In this case, we have:

$$\begin{aligned} \frac{\partial E_{\text{N-EE}}}{\partial R} &= \theta P_s \frac{\partial \rho_1^{(n)}}{\partial R} + \bar{\theta} P_s \left( \frac{\partial \eta_2^{(n)}}{\partial R} + \frac{\partial \rho_2^{(n)}}{\partial R} \right) + \bar{\theta} P_r \frac{\partial \rho_r^{(n)}}{\partial R} \\ &= \theta P_s \frac{\partial \rho_1^{(n)}}{\partial R} + \left( \frac{N\bar{\theta}}{|h_d|^2} - \frac{N\bar{\theta}}{|h_d|^2 + |h_r|^2} \right) \frac{\partial G_s^{(n)}}{\partial R} + \frac{N\bar{\theta}}{|h_d|^2 + |h_r|^2} \frac{\partial G_d^{(n)}}{\partial R} \end{aligned}$$

Since the source power constraint is met with equality, the right derivative (scheme R-EE) is such that

$$\begin{aligned} \frac{\partial E_{\text{R-EE}}}{\partial R} &= \bar{\theta} P_r \frac{\partial \rho_r^{(r)}}{\partial R} = \frac{\bar{\theta} N}{|h_r|^2} \left( \frac{P_s |h_d|^2}{N} \frac{\partial \rho_2^{(r)}}{\partial R} + \frac{\partial G_d^{(r)}}{\partial R} - \frac{\partial G_s^{(r)}}{\partial R} \right. \\ &\quad \left. - \sqrt{\frac{P_s |h_d|^2}{N}} \left( \sqrt{\frac{(G_d - G_s)}{\rho_2}} \frac{\partial \rho_2^{(r)}}{\partial R} + \sqrt{\frac{\rho_2}{(G_d - G_s)}} \left( \frac{\partial G_d^{(r)}}{\partial R} - \frac{\partial G_s^{(r)}}{\partial R} \right) \right) \right) \end{aligned}$$

Since  $\frac{\partial \rho_2^{(r)}}{\partial R} = -\frac{\theta}{\bar{\theta}} \frac{\partial \rho_1^{(r)}}{\partial R} - \frac{N}{P_s |h_d|^2} \frac{\partial G_s^{(r)}}{\partial R}$ , then

$$\begin{aligned} \frac{\partial E_{\text{R-EE}}}{\partial R} &= \frac{\bar{\theta} N}{|h_r|^2} \left( \frac{P_s |h_d|^2}{N} - \sqrt{\frac{P_s |h_d|^2}{N} \frac{(G_d - G_s)}{\rho_2}} \right) \frac{\partial \rho_1^{(r)}}{\partial R} + \frac{\bar{\theta} N}{|h_r|^2} \left( 1 - \sqrt{\frac{P_s |h_d|^2}{N} \frac{\rho_2}{(G_d - G_s)}} \right) \frac{\partial G_d^{(r)}}{\partial R} \\ &\quad - \frac{\bar{\theta} N}{|h_r|^2} \left( \frac{N}{P_s |h_d|^2} \left( \frac{P_s |h_d|^2}{N} - \sqrt{\frac{P_s |h_d|^2}{N} \frac{(G_d - G_s)}{\rho_2}} \right) + \left( 1 - \sqrt{\frac{P_s |h_d|^2}{N} \frac{\rho_2}{(G_d - G_s)}} \right) \right) \frac{\partial G_s^{(r)}}{\partial R} \end{aligned}$$

Now, recall that both N-EE and R-EE are continuous at this particular rate. Thus,  $\rho_2 = \frac{P_r |h_d|^2}{P_s |h_r|^2} \rho_r = \frac{N |h_d|^2 (G_d - G_s)}{P_s (|h_r|^2 + |h_d|^2)^2}$  and we can prove that the right derivative of G-EE is also such that

$$\frac{\partial E_{\text{R-EE}}}{\partial R} = \theta P_s \frac{\partial \rho_1^{(r)}}{\partial R} + \left( \frac{N \bar{\theta}}{|h_d|^2} - \frac{N \bar{\theta}}{|h_d|^2 + |h_r|^2} \right) \frac{\partial G_s^{(r)}}{\partial R} + \frac{N \bar{\theta}}{|h_d|^2 + |h_r|^2} \frac{\partial G_d^{(r)}}{\partial R}$$

which is similar to the left derivative  $\frac{\partial E_{\text{N-EE}}}{\partial R}$ . Now, define the constant  $C$  (that may depend on channel gains or on the source rate) such that  $\frac{\partial \rho_1^{(r)}}{\partial R} = \frac{\partial \rho_1^{(n)}}{\partial R} + C$ . We get  $\frac{\partial G_i^{(r)}}{\partial R} = \frac{\partial G_i^{(n)}}{\partial R} - C \frac{\theta P_s |h_i|^2}{\bar{\theta} N} \frac{G_i}{\Gamma_i}$  and

$$\begin{aligned} \frac{\partial E_{\text{R-EE}}}{\partial R} &= \frac{\partial E_{\text{N-EE}}}{\partial R} - C \theta P_s \left( \left( 1 - \frac{|h_d|^2}{|h_d|^2 + |h_r|^2} \right) \frac{|h_s|^2}{|h_d|^2} \frac{G_s}{\Gamma_s} + \frac{|h_d|^2}{|h_d|^2 + |h_r|^2} \frac{G_d}{\Gamma_d} - 1 \right) \\ &= \frac{\partial E_{\text{N-EE}}}{\partial R} - C \theta P_s \left( 1 + \frac{|h_r|^2}{|h_d|^2} \right) g_1(\rho_1) \end{aligned}$$

Since  $g_1(\rho_1) = 0$ , then  $\frac{\partial E_{\text{N-EE}}}{\partial R} = \frac{\partial E_{\text{R-EE}}}{\partial R}$  at  $R = R_{\text{max}}^{(n)}$ , which completes the proof.

### B. Comparison with maximum rate scheme

First, if a source rate achieved with G-EE is not also rate-optimal for this energy, then there exists another set of power allocation that consumes the same energy but achieves a better rate  $R_m$ . For this higher rate  $R_m$ , G-EE consumes more energy than the maximum-rate scheme and is thus suboptimal for energy, which is contradictory. Thus, for all achievable rates, G-EE is also rate-optimal.

Second, we want to prove that a rate-optimal scheme cannot achieve higher source rates than G-EE. Note that both G-EE and the maximum-rate scheme are optimization problems with four constraints  $\rho_1$ ,  $\eta_2$ ,  $\rho_2$  and  $\rho_r$ . The two rate constraints are always met with equality in both problems and, till  $R_{\text{max}}$ , G-EE is equivalent to rate-optimal scheme. When  $R \rightarrow R_{\text{max}}$ , the source power constraint is also met with equality (G-EE applies scheme R-EE). Hence, in the inferior neighbourhood of  $R_{\text{max}}$ , each optimization problem has just one degree of freedom left. When  $R \geq R_{\text{max}}$ , an outage occurs: either the desired source rate becomes infeasible, or the relay power constraint is also met with equality. Thus, above  $R_{\text{max}}$ , there

is no more degree of freedom for neither problem and  $R_{\max}$  is the maximal rate that can be achieved for both G-EE and maximum-rate scheme.

#### REFERENCES

- [1] T.Cover and A.Gamal, "Capacity theorems for the relay channel," *IEEE Trans. on Information Theory*, vol. 25, no. 5, pp. 572–584, 1979.
- [2] A.El Gamal, M.Mohseni, and S.Zahedi, "Bounds on capacity and minimum energy-per-bit for AWGN relay channels," *IEEE Trans. on Information Theory*, vol. 52, no. 4, pp. 1545 –1561, Apr. 2006.
- [3] G.Kramer, M.Gastpar, and P.Gupta, "Cooperative strategies and capacity theorems for relay networks," *IEEE Trans. on Information Theory*, vol. 51, no. 9, pp. 3037–3063, 2005.
- [4] A.Host-Madsen, "On the capacity of wireless relaying," *Vehicular Technology Conference Fall, 2002*, vol. 3, pp. 1333 – 1337 vol.3, 2002.
- [5] M.Alasti, B.Neekzad, J.Hui, and R.Vannithamby, "Quality of service in WiMAX and LTE networks [Topics in Wireless Communications]," *IEEE Communications Magazine*, vol. 48, no. 5, pp. 104 –111, May 2010.
- [6] J.Laneman, D.Tse, and G.Wornell, "Cooperative diversity in wireless networks: Efficient protocols and outage behavior," *IEEE Trans. on Information Theory*, vol. 50, no. 12, pp. 3062 – 3080, Dec. 2004.
- [7] Z.Dawy and H.Kamoun, "The general Gaussian relay channel: Analysis and insights," *5th International ITG Conference on Source and Channel Coding (SCC)*, vol. 181, p. 469, 2004.
- [8] J.Gómez-Vilardebó, A.Perez-Neira, and M.Nájar, "Energy efficient communications over the AWGN relay channel," *IEEE Trans. on Wireless Communications*, vol. 9, no. 1, pp. 32–37, 2010.
- [9] P.Hoehner and T.Wo, "Superposition modulation: myths and facts," *IEEE Communications Magazine*, vol. 49, no. 12, pp. 110 –116, December 2011.
- [10] F.Parzysz, M.Vu, and F.Gagnon, "A half-duplex relay coding scheme optimized for energy efficiency," in *IEEE Information Theory Workshop (ITW)*, October 2011, pp. 306 –310.
- [11] M.Ergen, *Mobile Broadband - Including WiMAX and LTE*, 1st ed. Springer Publishing Company, Incorporated, 2009.
- [12] P.Kyösti, J.Meinilä, L.Hentilä *et al.*, "WINNER II Channel Models, Part I Channel Models," Information Society Technologies, Tech. Rep. IST-4-027756 WINNER II, D1.1.2 V1.1 - Public, September 2007, [Online] Available: <http://www.ist-winner.org/WINNER2-Deliverables/D1.1.2v1.1.pdf>.

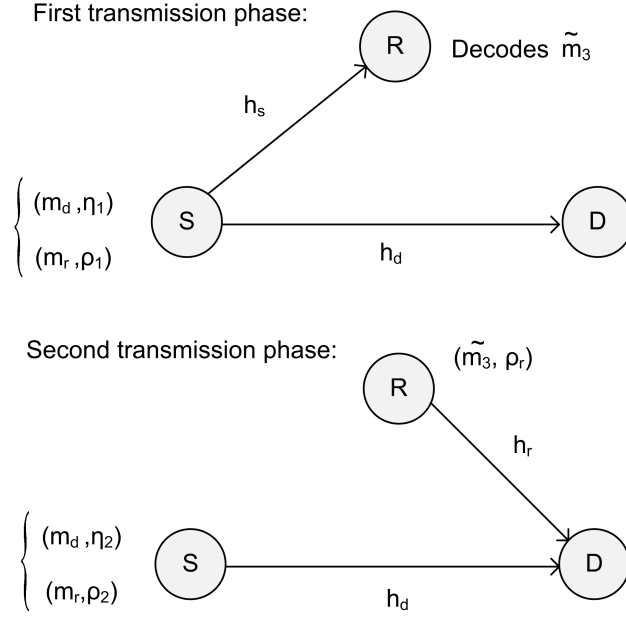


Fig. 1: A Half-Duplex Coding Scheme for Relay Channels

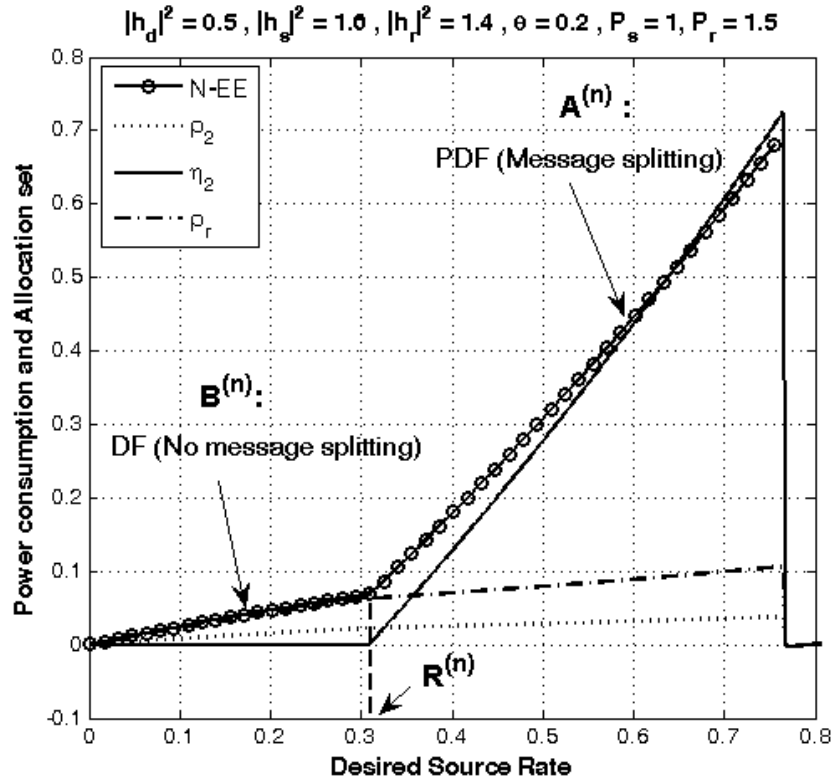


Fig. 2: Power consumption for N-EE and set of power allocation during phase 2.

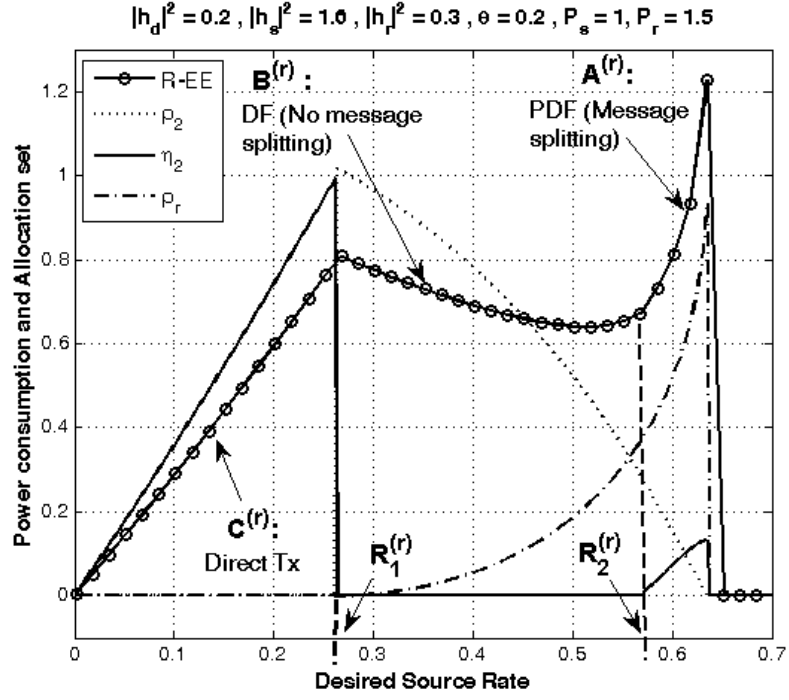


Fig. 3: Power consumption for R-EE and set of power allocation during phase 2.

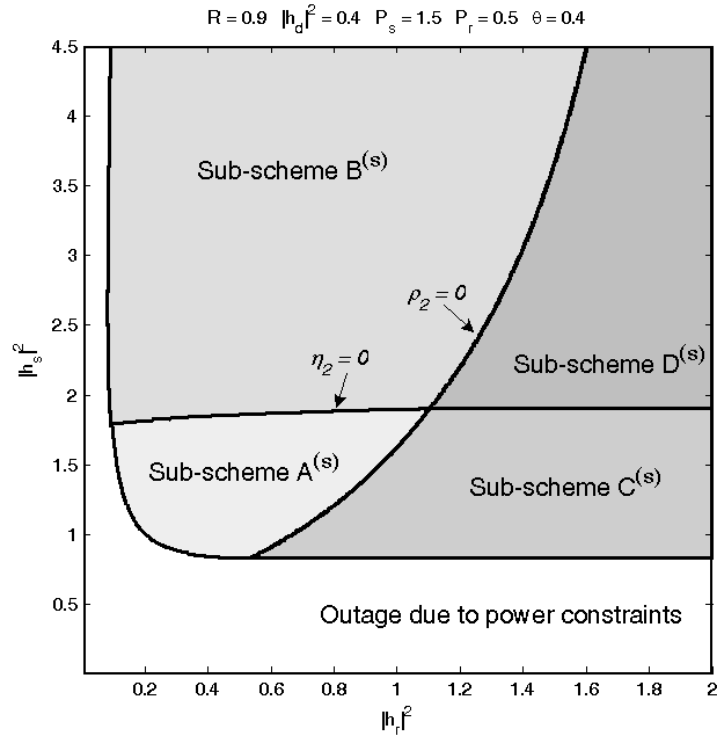


Fig. 4: Applied sub-schemes in S-EE, as a function of the SR- and RD- links.

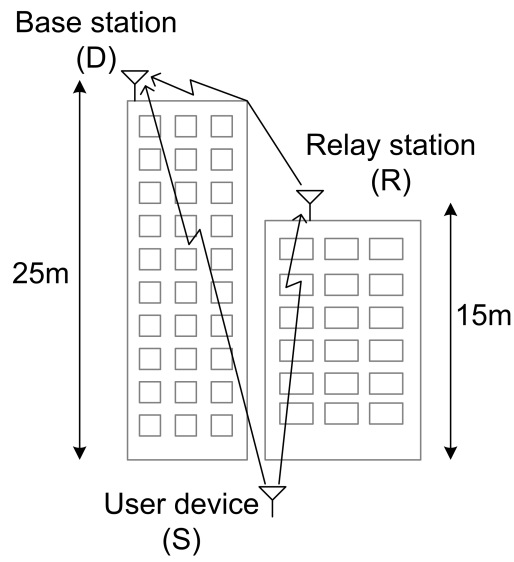


Fig. 5: Communication in a realistic environment

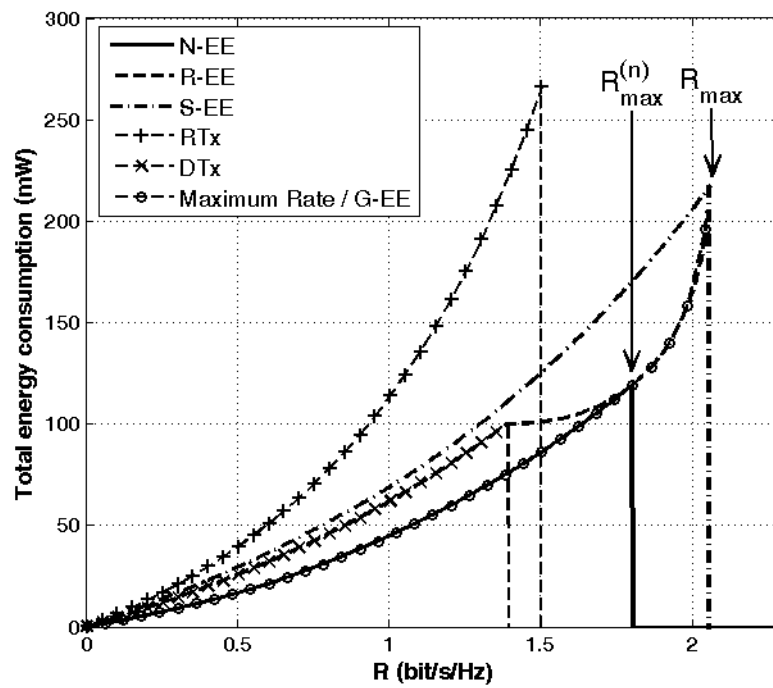


Fig. 6: Total power consumption as a function of the source rate during both phases.

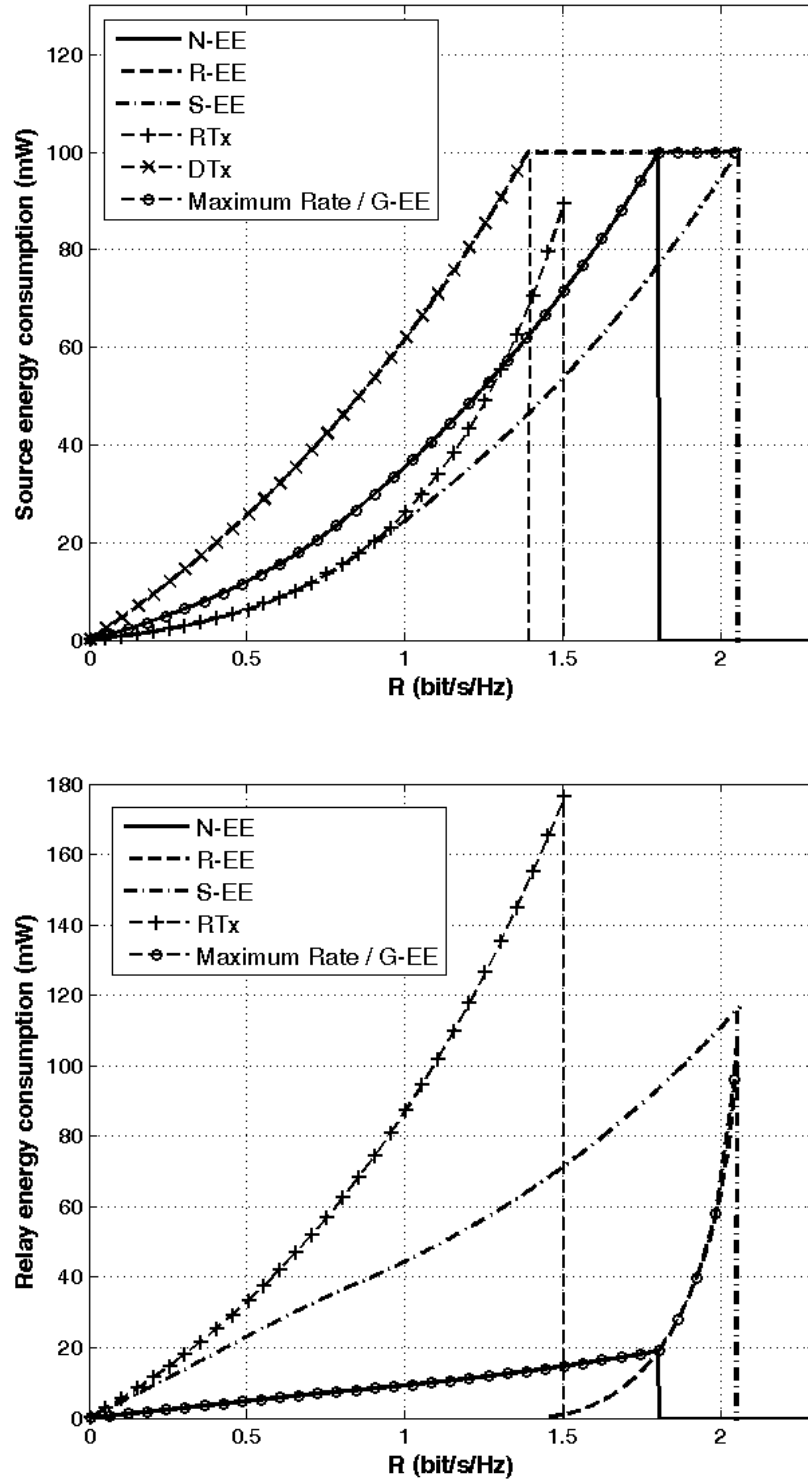


Fig. 7: Power consumption per node: source (above) and relay (below)

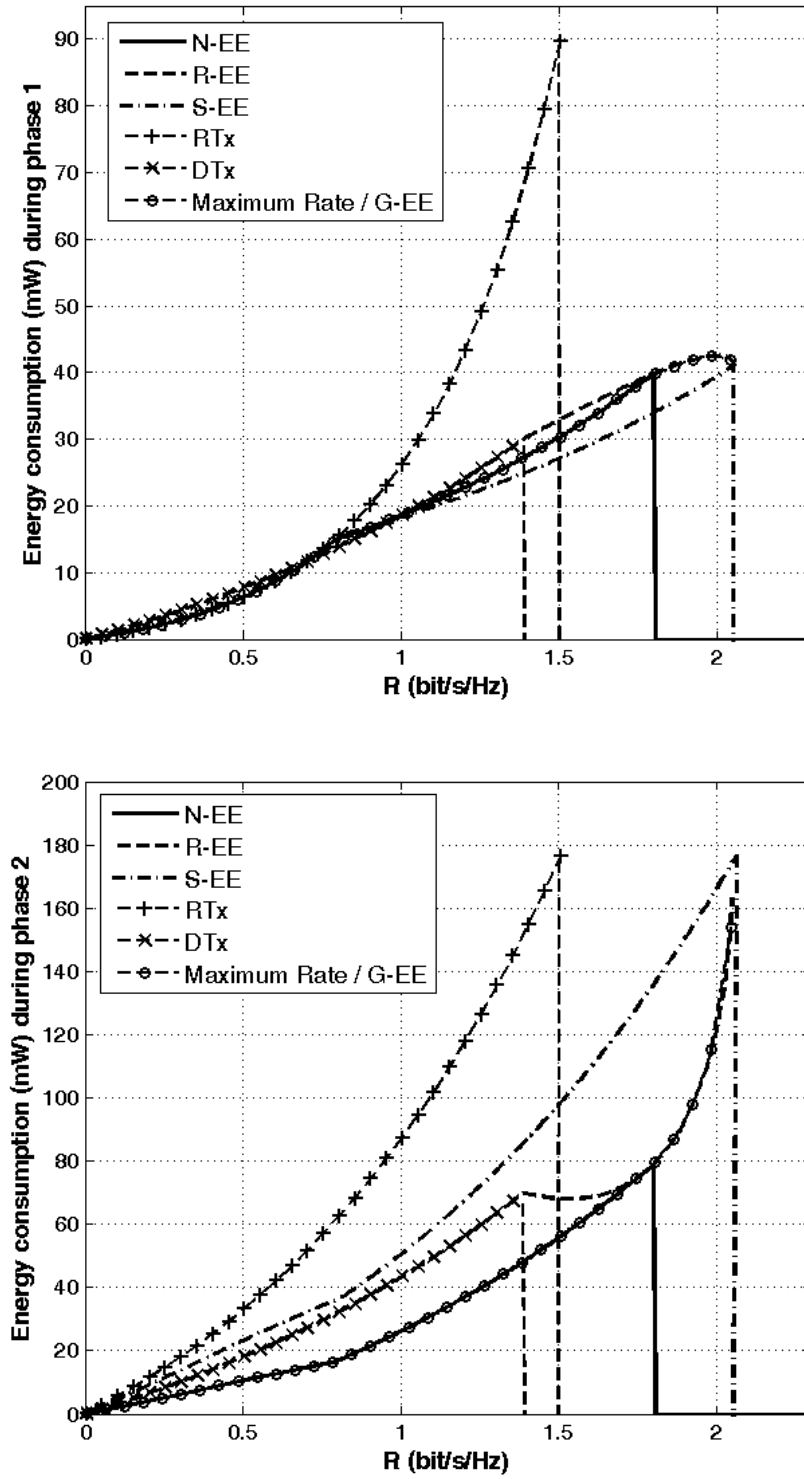


Fig. 8: Power consumption per phase: phase 1 (above) and phase 2 (below)

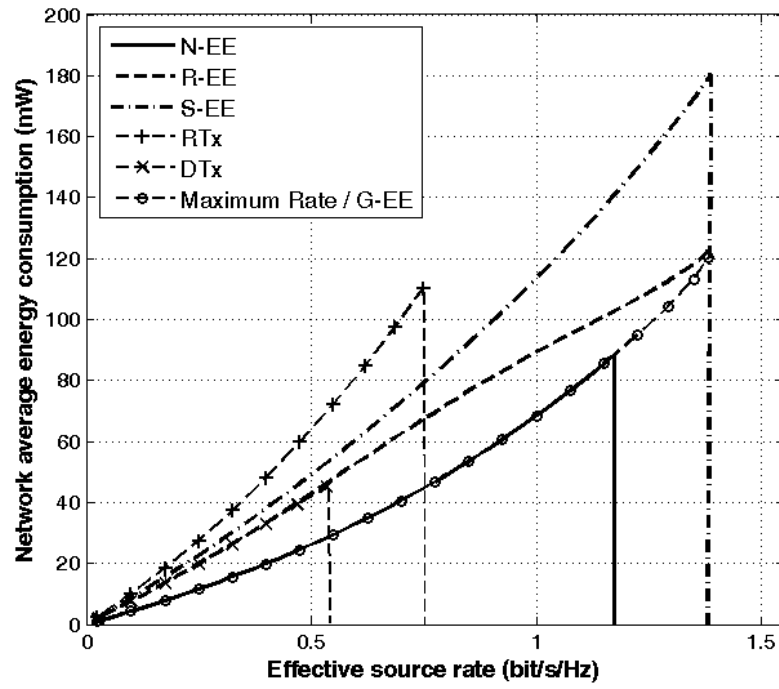


Fig. 9: Total average energy gain as a function of the source rate

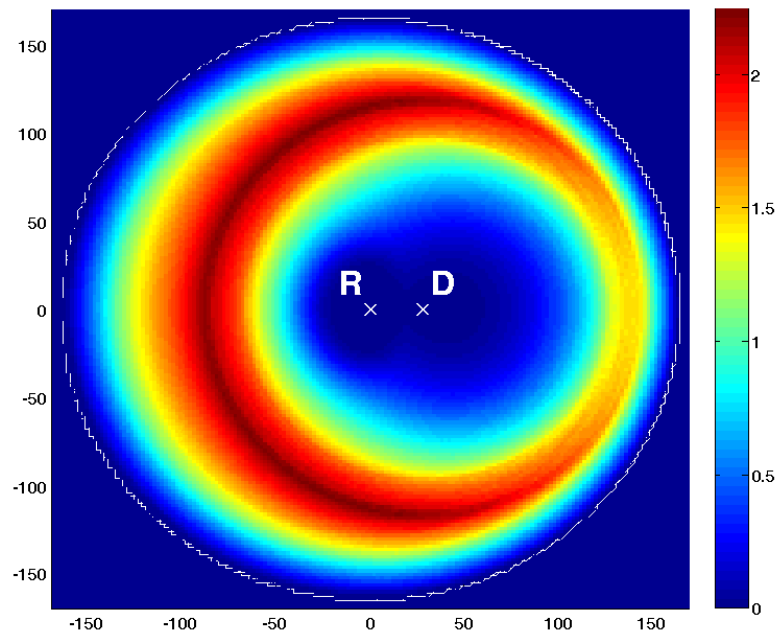


Fig. 10: Total average energy gain (dB) as a function of the mobile user position

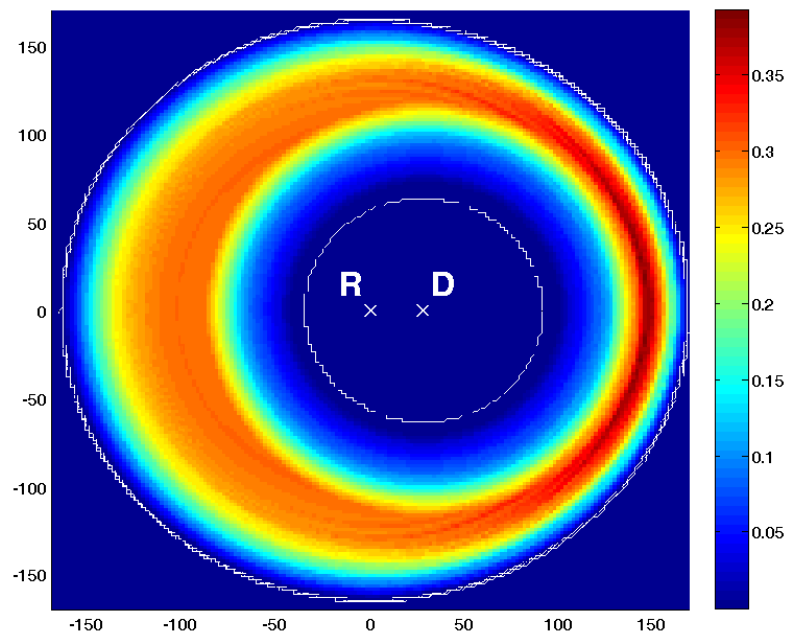


Fig. 11: Outage reduction (%) as a function of the mobile user position